

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60191258

Customer pos. no.:

Model :

GRINDER FX 15.15 M-NA 230 V

Type of installation :

Wet - Pump only

Pump data

Free passage :

--

Max. immersion depth :

20 m

Min. fluid temperature :

0 °C

Max. fluid temperature :

50 °C

Requested data

Flow :

Head :

Fluid :

Water

Fluid Temperature :

20 °C

Density :

998,3 kg/m³

Kinematic viscosity :

1,005 mm²/s

Vapor pressure :

0,00234 MPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Handle

Cast iron (EN GJL 200)

Pump body / motor

Cast iron (EN GJL 200)

Impeller

Cast iron (EN GJL 250)

Mechanical seal pump side

SiC-SiC/SiC-C

Mechanical seal motor side

SiC/Carbon




O-Ring

NBR

Cutter / Cutter Base

Steel EN1.4542 / AISI 630

Curve tolerance according to ISO 9906

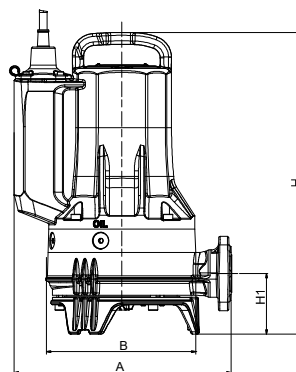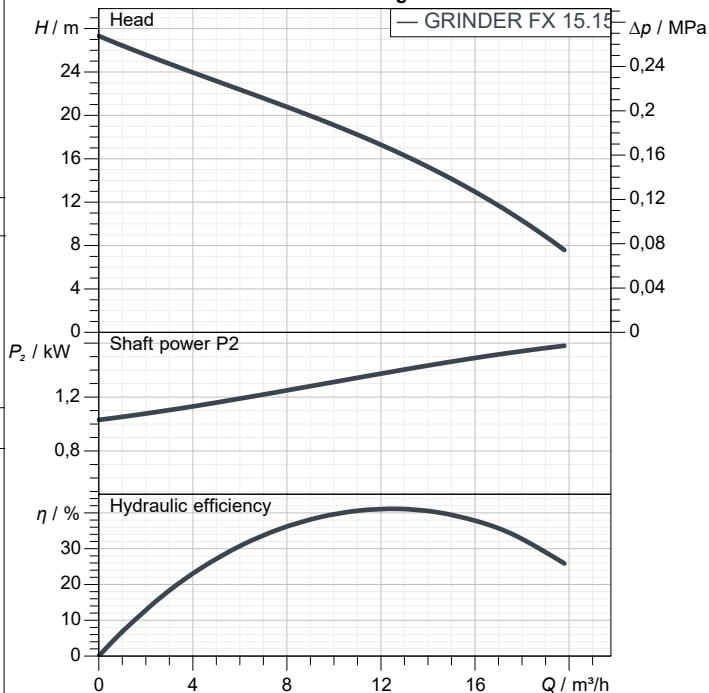

Motor data

Motor brand :

DAB

Nominal power P2 :

1,6 kW

Rated speed :

2.870 1/min

Rated voltage :

1~ 230 V

50 Hz

Nominal current :

9,8 A

Degree of protection :

IP 68

Weight :

38 kg

Accessory weight :

Dimensions in

mm

A	306				
B	215				
DN1	32, 40				
GAS	Rp 1"1/2				
H	413				
H1	87				

Pump connection

Suction side :

--

Discharge side :

Rp 1"1/2 - DN 32 PN10/6, DN 40 PN6


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

GRINDER FX 15.15 M-NA 230 V

Curve tolerance according to ISO 9906

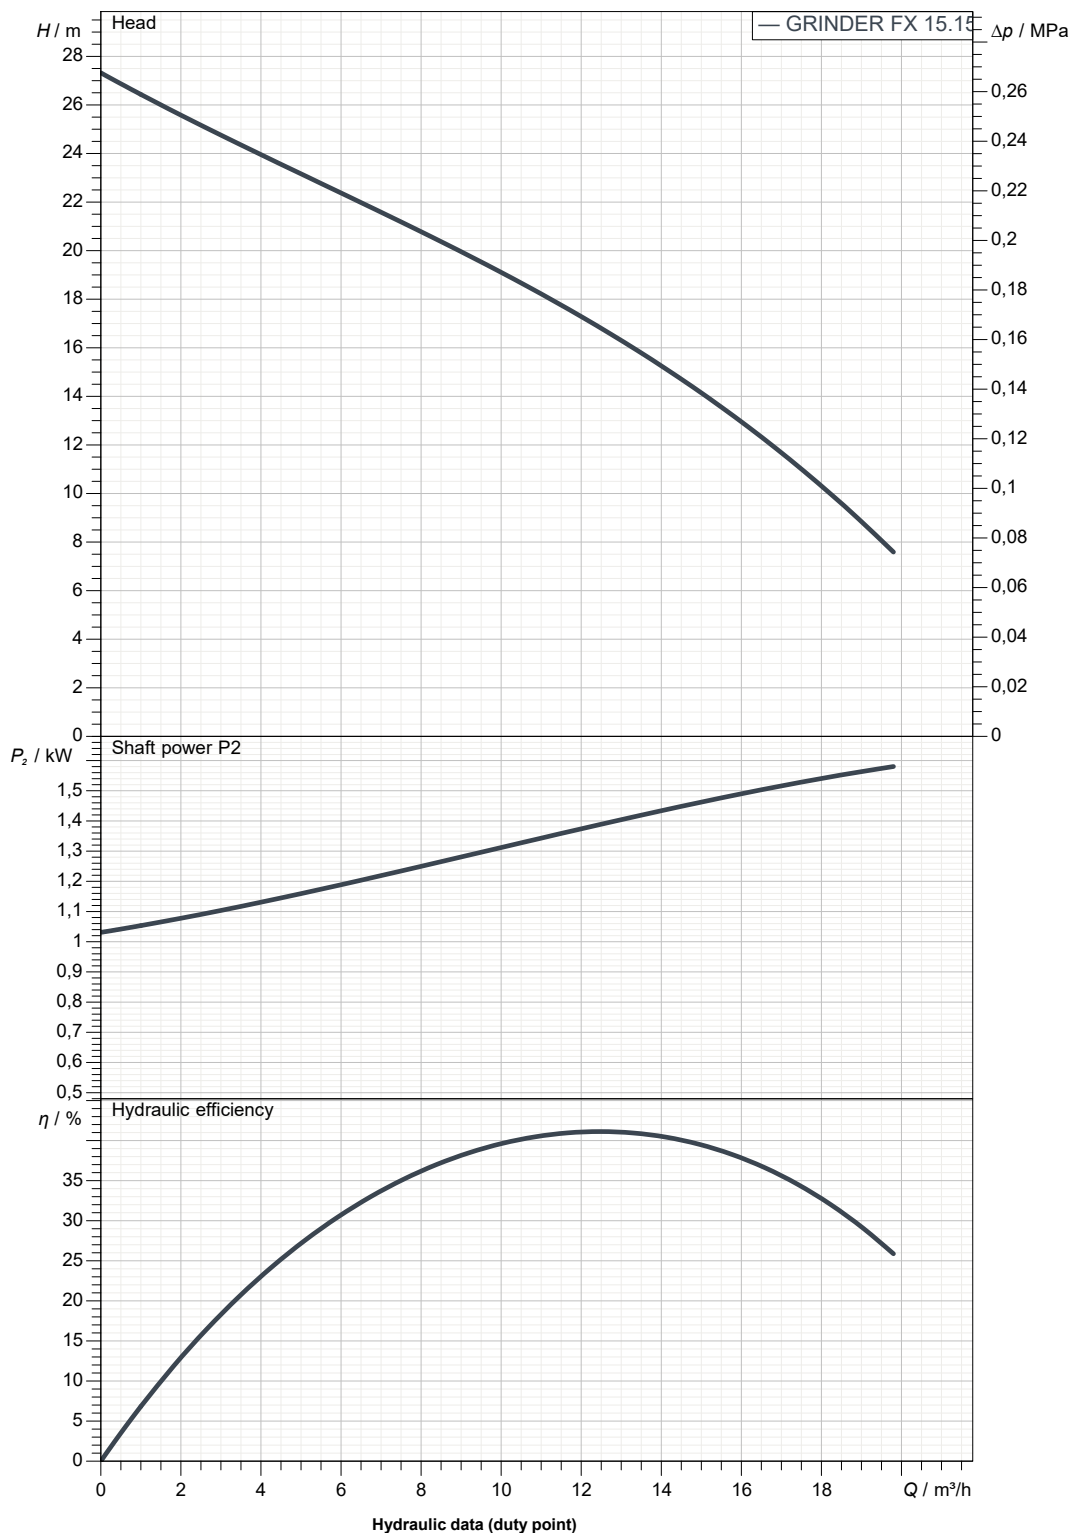

Suction side :

Discharge side :
Rp 1"1/2 - DN 32 PN10/6, DN 40 PN6
--

Flow :

Head :

Rated speed :
2.870 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

2023-06-26



DIMENSIONAL DRAWING

2023-06-26

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

GRINDER FX 15.15 M-NA 230 V

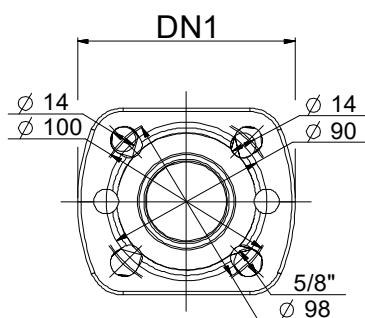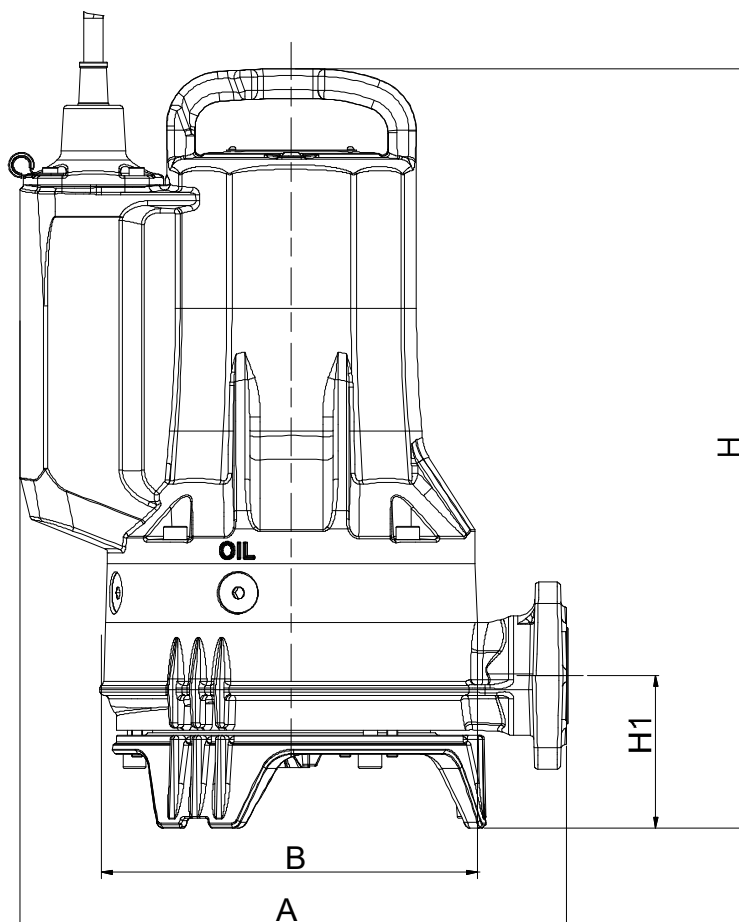

Dimensions in mm

Pump connection

1	A	306								
2	B	215								
3	DN1	32, 40								Suction
4	GAS	Rp 1"1/2								
5	H	413								Discharge
6	H1	87								Rp 1"1/2 - DN 32 PN10/6, DN 40 PN6
7										--
8										
9										
10										
11										

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

2023-06-26