

FEKAFOS 200

AUTOMATIC PUMPING STATION



WASTE WATER COLLECTION AND LIFTING

Automatic collection and lifting stations, used for collecting and pumping civil and industrial waste water in sewers. Comprises a high density 200 litre polythene tank with removable cover complete with a watertight and gastight seal.

Fekafos series is suitable only for the use of one not automatic single/triphas pump from the following: **FEKA 600 M-NA - FEKA VS-VX 550 M-NA /T-NA - FEKA VS-VX 750 M-NA /T-NA - FEKA VS-VX 1000 M-NA /T-NA - FEKA VS-VX 1200 M-NA /T-NA, GRINDER 1000-1200-1600T, GRINDER 1400 M -1800 T, to be ordered separately.**

Complete with: 2 bulb floats mounted on a stainless steel support, cable holder for connecting the float and pump cables to the electrical panel **(to order separately according to the performance range table).**

Complete with: 2" PVC unions, DN50 and DN110 suction manifolds and 2" delivery manifolds. Complete with connector for DN50 vent tube.

An alarm float can be used on request.


Operating range: from 1 to 32 m³/h with a head of up to 23 m.

Liquid temperature range: +50°C.


Pumped liquid: ground water, rain water, clear waste water, black waste water and water from rivers and lakes.

TECHNICAL DATA

MODEL	CODE	CAPACITY [lt]	DIMENSION [mm]	TO BE USED WITH	DN PIPES [mm]
FEKAFOS 200	60114041	200	750x579x700	FEKA 600 M-NA/T, FEKA VS/VX 550-750-1000-1200 M-NA/T, GRINDER 1000-1200-1600 T, GRINDER 1400 M-1800 T	3x DN110, 1x DN50, 1x DN75 inlet, 1x DN50 ventilation, 1x DN40 emergency emptying

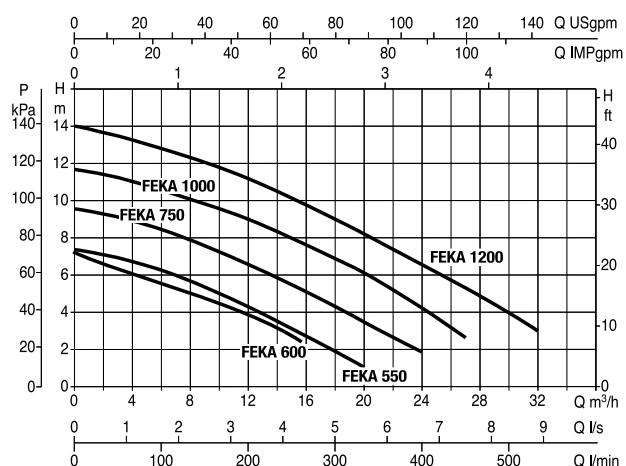

DIMENSIONS AND WEIGHTS

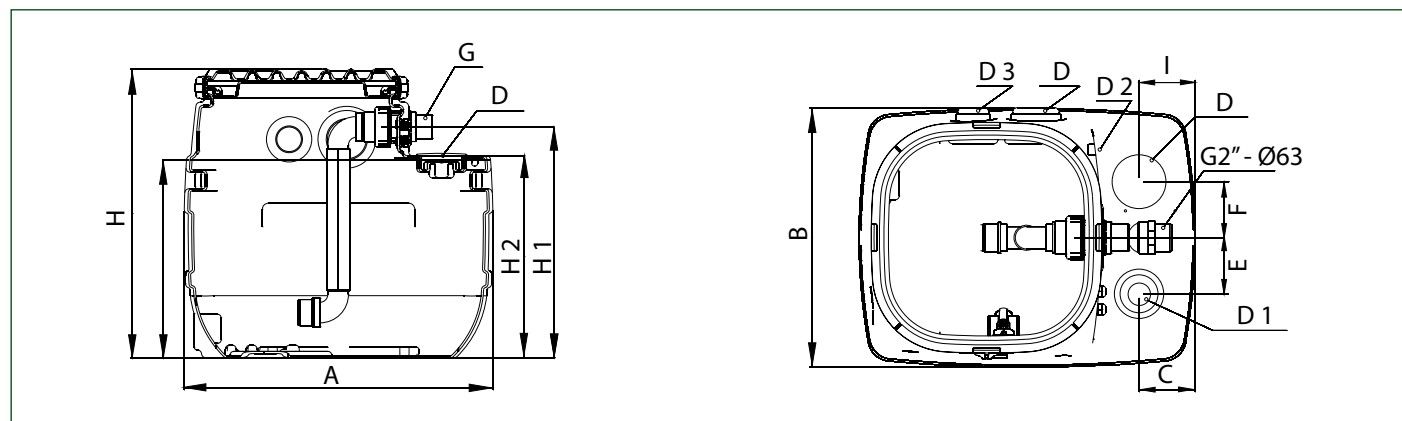

MODEL	A	B	C	D	D1	D2	D3	E	F	G	H	H1	H2	I	WEIGHT KG.
FEKAFOS 200	750	579	124,5	DN 110	DN 50/110	DN 50	DN 75	125	125	2"	700	560	490	124,5	34