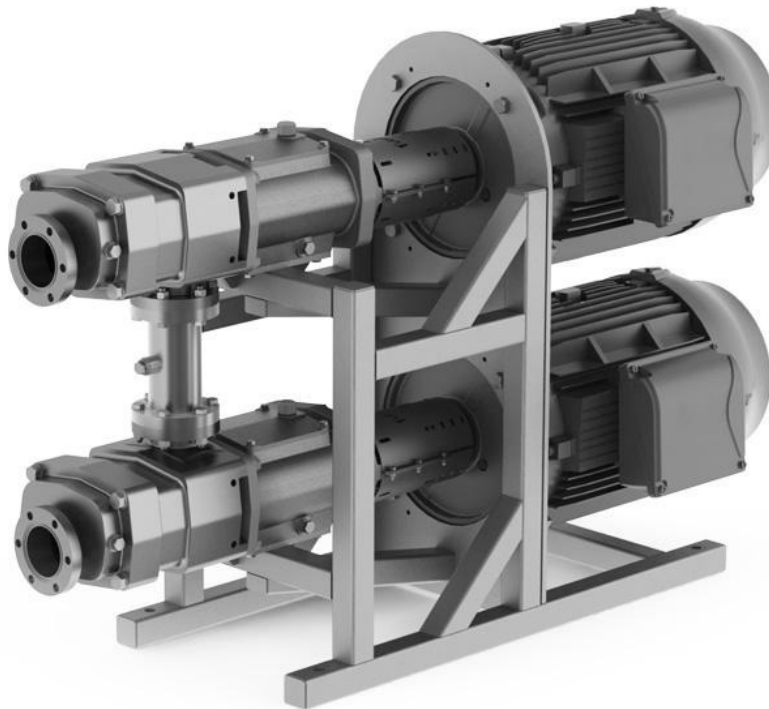


[Home](#)[Products](#)[Applications](#)[Company](#)[Contact](#)[- VPS Power Pack](#)

## VPS POWER PACK

The VPS Power Pack is a unit with two VPS pumps in a row, designed for pressures up to 50 bar. The compact design and control via a frequency converter enable efficient installation, even in demanding circumstances, and a unit specifically adapted to a particular application on the basis of standard pumps.

### The advantages at a glance

### Power Pack key figures:

Flow rate: up to 150 m<sup>3</sup>/h

[Privacy & Cookies Policy](#)

- Conveying elements run contact-free which means abrasion-free and safe to run dry
- Stable characteristic curve in the event of changing operating parameters, even with low flow rates
- Trouble-free transport of low to highly viscous products (e.g. ethanol at 0.6 mm<sup>2</sup>/s or asphalt at 74,000 mm<sup>2</sup>/s)
- Suction performance up to 3.5 m NPSHa
- Gentle, virtually pulsation-free liquid transport without crushing or turbulence
- Designs available in a wide variety of material combinations, in compact size, ATEX or TA Luft [Technical Instructions on Air Quality Control]

Suction pressure:	up to -0,65 bar
Differential pressure:	max. 50 bar
Viscosity:	0,5-30.000 mm <sup>2</sup> /s

Feel free to contact us!

© 2020 VPS Pumpen / Fristam Pumpen Schaumburg GmbH

[Privacy notice](#)   [Imprint](#)