



Data Sheet 100B43.7H-52

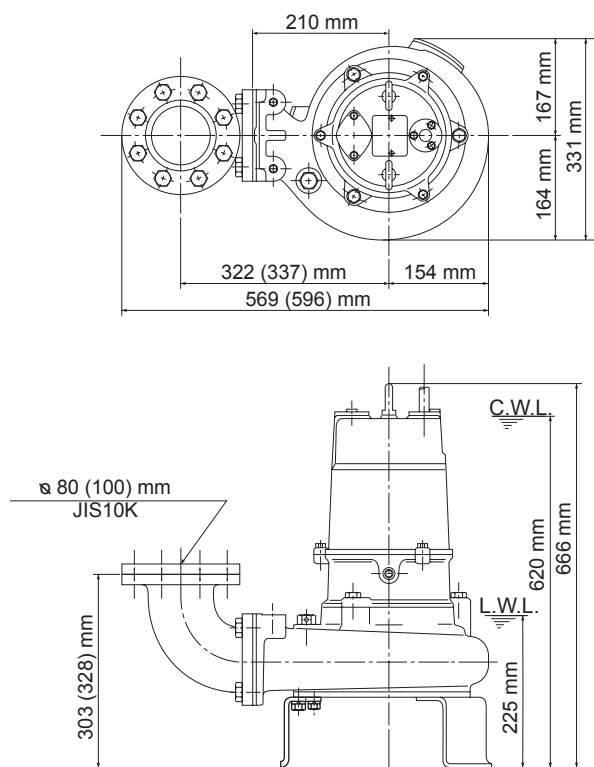

C.W.L. = Continuous running water level
L.W.L. = Lowest running water level

100B43.7H-52

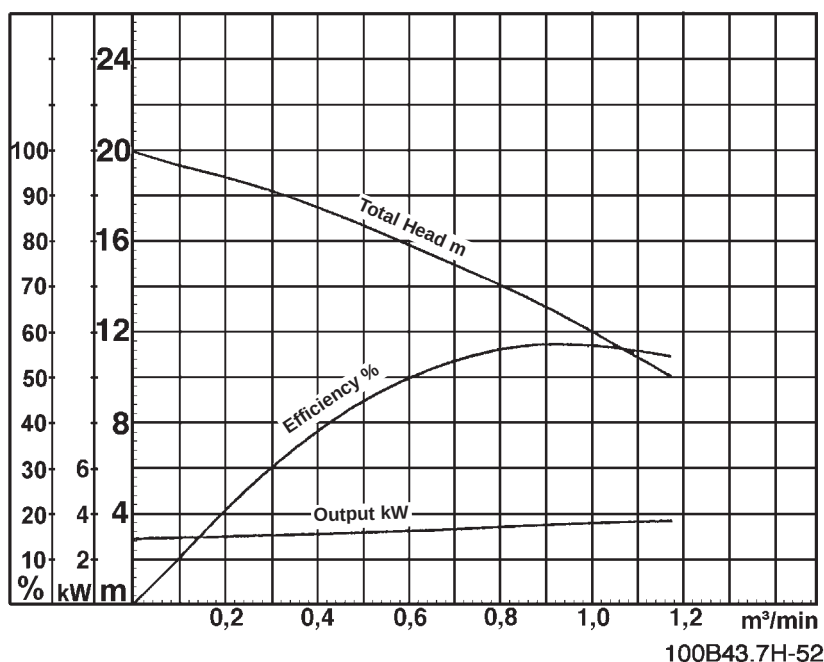

Classification

Electric submersible pump
Protection class IP68
Depth of submersion max. 30m
1-channel impeller, non-clogging type
Impeller passage 60mm
Suitable for waste water and liquids carrying waste and solid matters

Electric Motor

Dry-type submersible induction motor,
Insulation class E, 4 poles, 1450 r.p.m.
Direct on line start
Voltage: 400V, 50Hz, 3-phase
Power input: 4,70kW
Power output: 3,70kW
Nominal current: 8,0A
Start current: 49,5A

Electric Cable

10m H07RN-F 4Cx1,5mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft Seal

Double mechanical seal in oil bath
additional lubrication by oil lifting device
Primary Seal:
silicon carbide on silicon carbide
Secondary Seal:
ceramic on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller: FC200 (EN-GJL-200)
Casing: FC200 (EN-GJL-200)
Suction Cover: FCD700 (EN-GJS-700-2)
Motor frame: FC200 (EN-GJL-200)
Shaft: SUS420J2 (EN X30Cr13)



Discharge Connection

4" (100mm) JIS10K screwed-in mating flange
Guide rail fitting optional

Weight

81 kg (dry weight of the pump without cable)

Dimensional Drawing 100B43.7H-52

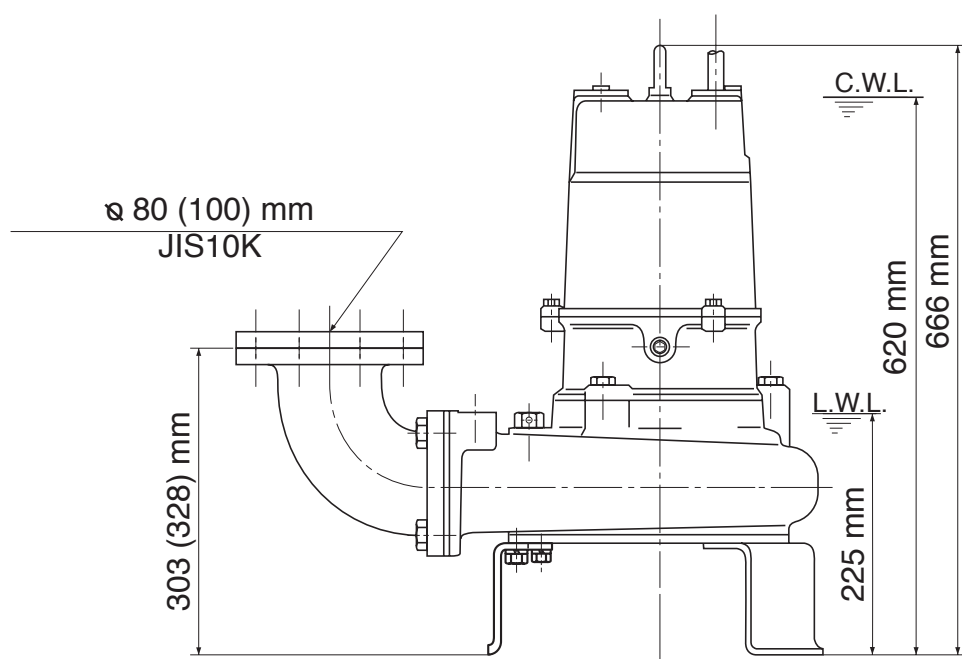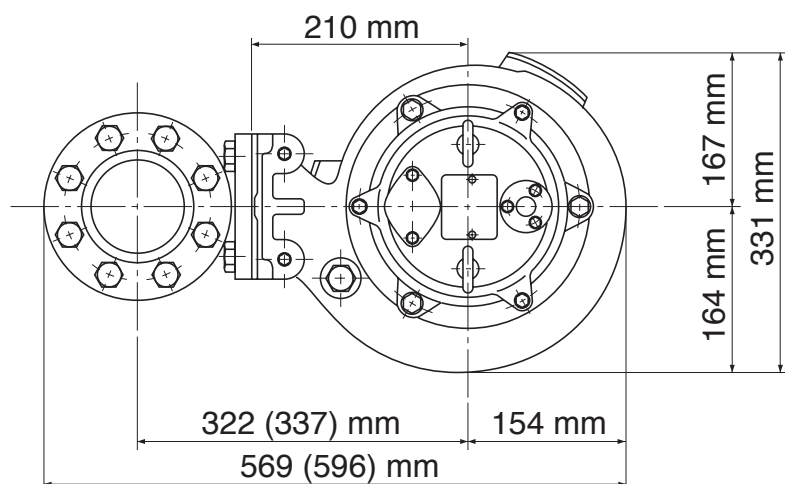


100B43.7H-52

CWL: Continuous Running Water Level


LWL: Lowest Running Water Level

Dimensional Drawing TOS100B43.7H-52

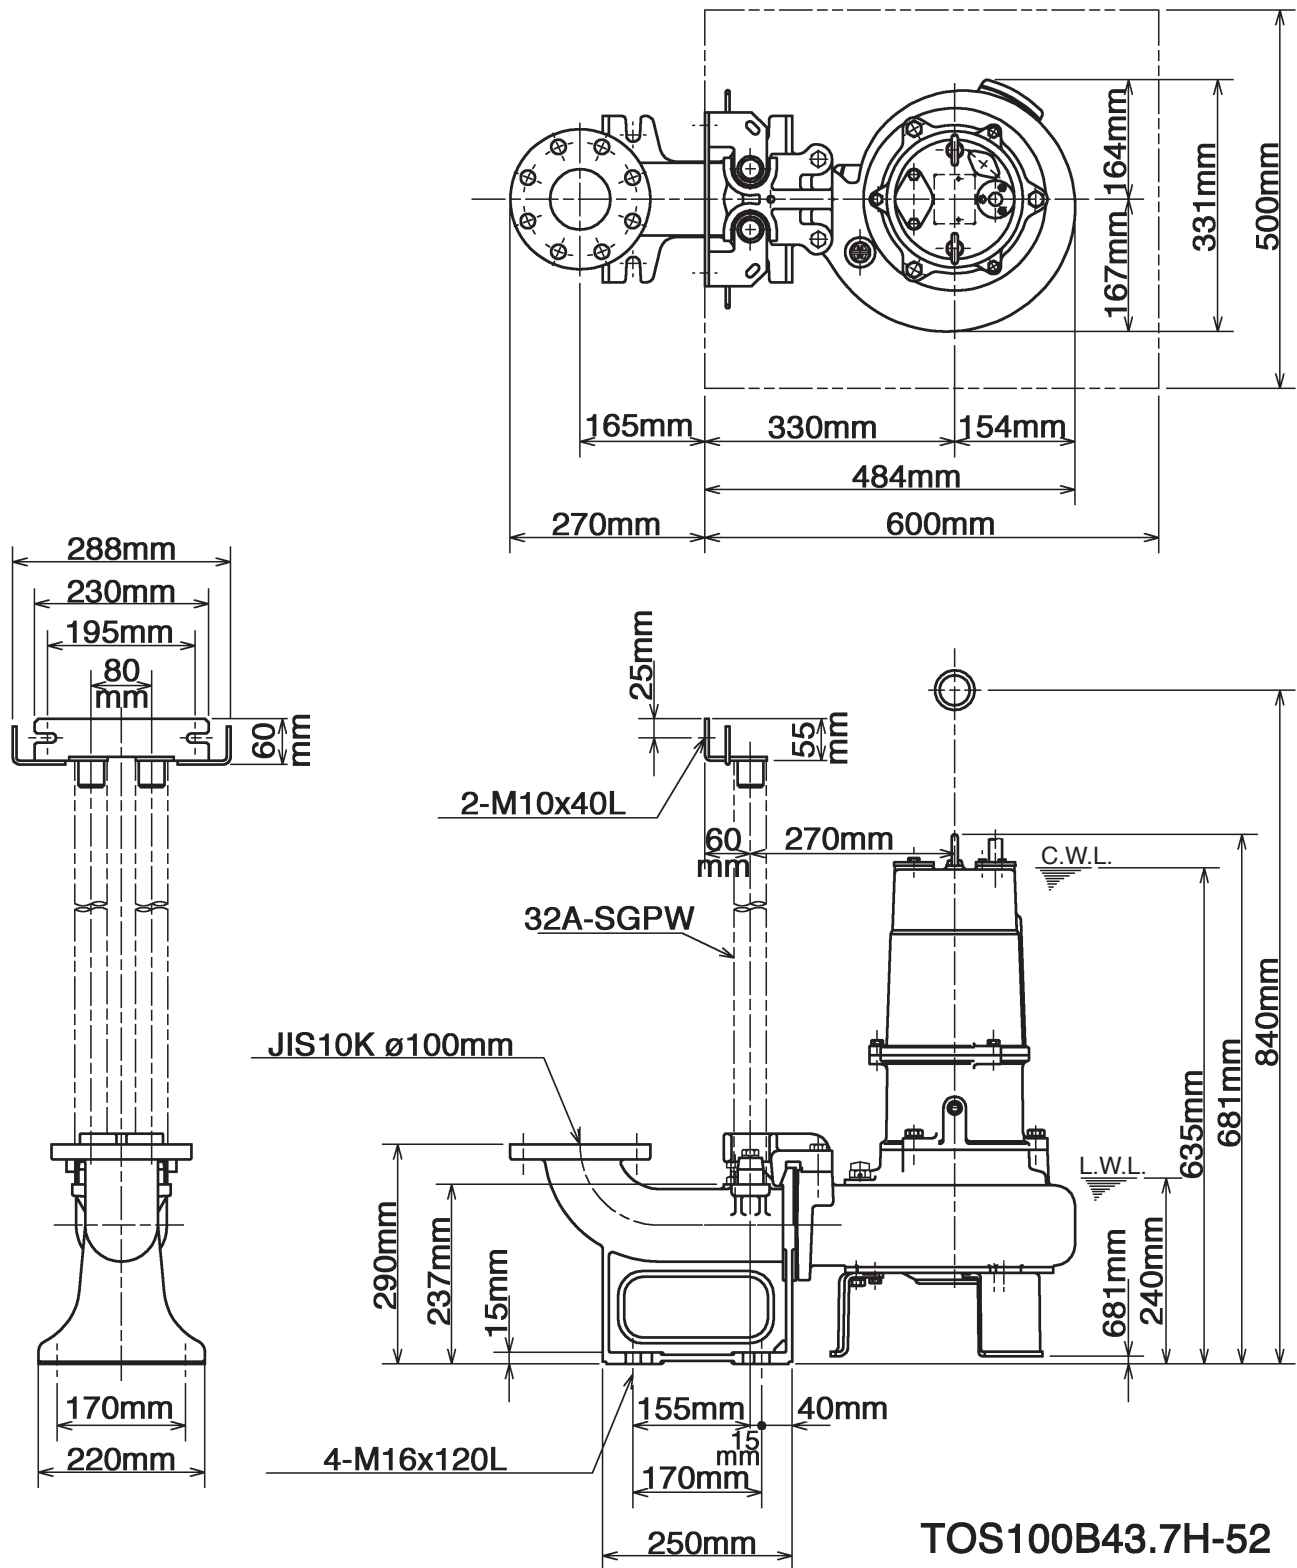

CWL: Continuous Running Water Level
LWL: Lowest Running Water Level


Sectional Drawing 100B43.7H-52

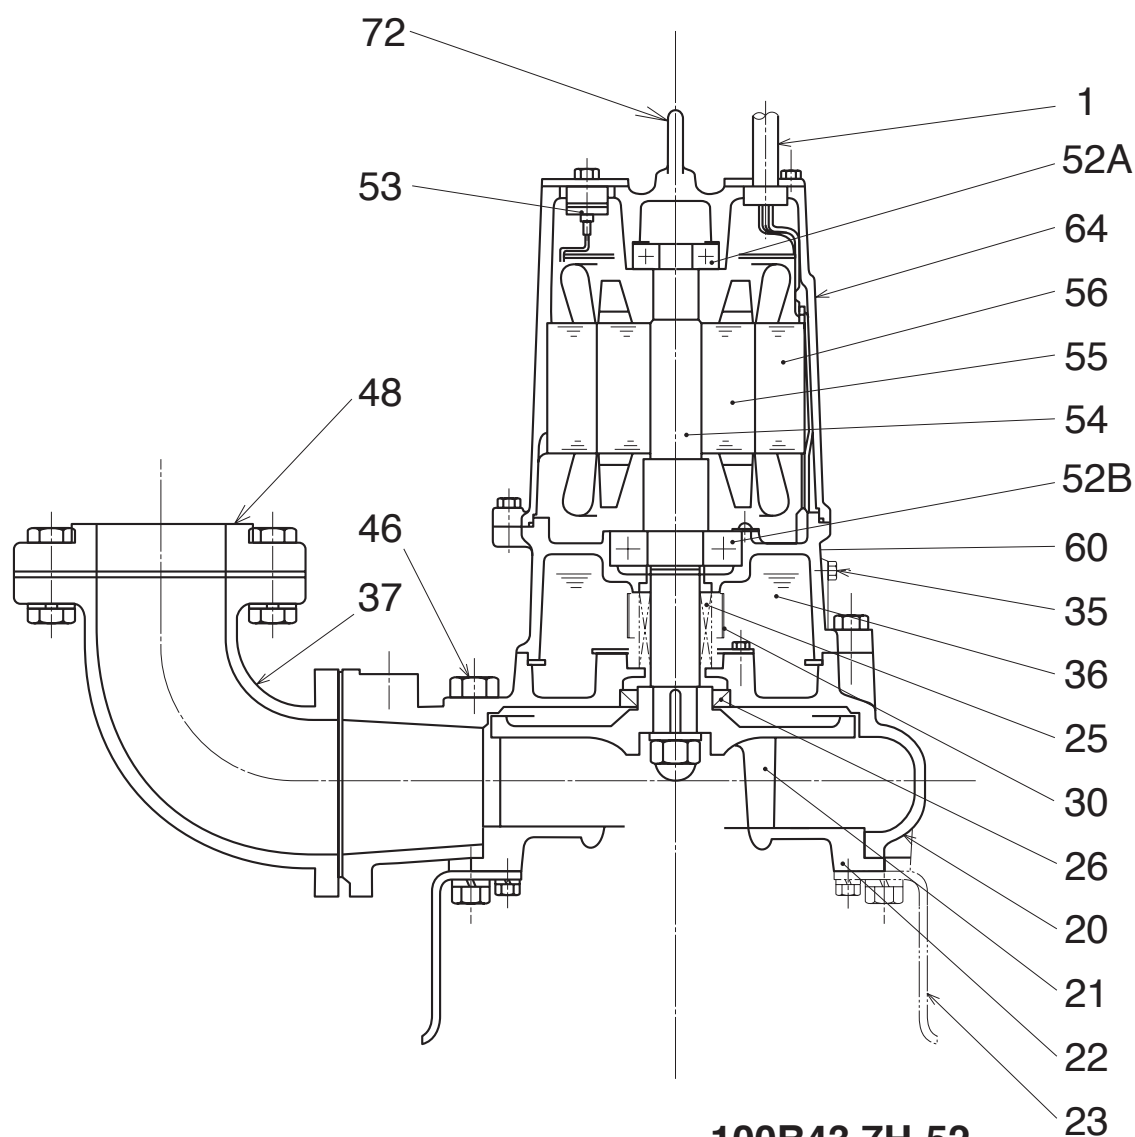

100B43.7H-52

No.	Description	Qty.	Remarks	No.	Description	Qty.	Remarks
1	Cabtyre Cable	1	H07RN-F	52B	Lower Bearing	1	6309ZZC3
20	Pump Casing	1	FC200 (EN-GJL-200)	53	Motor Protector	1	
21	Impeller	1	FC200 (EN-GJL-200)	54	Shaft	1	SUS420J2 (EN X30Cr13)
22	Suction Cover	1	FC200 (EN-GJL-200)	55	Rotor	1	
23	Stand	3	SS400 (DIN 1.0040)	56	Stator Complete	1	
25	Mechanical Seal	1	H-35A	60	Bearing Housing	1	FC200 (EN-GJL-200)
26	Oil Seal	1	TC507212	64	Motor Frame	1	FC200 (EN-GJL-200)
30	Oil Lifter	1	Plastic	72	Eye Bolt	2	SUS304 (EN-X5CrNi18-10)
35	Oil Plug	1	SUS304 (EN-X5CrNi18-10)				
36	Lubricant		Turbine Oil (ISO VG32)				
37	Discharge Bend	1	FC200 (EN-GJL-200)				
46	Air Release Valve	1	Nylon				
48	Screw Flange	1	FC200 (EN-GJL-200)				
52A	Upper Bearing	1	6304ZZC3				

Sectional Drawing TOS100B43.7H-52

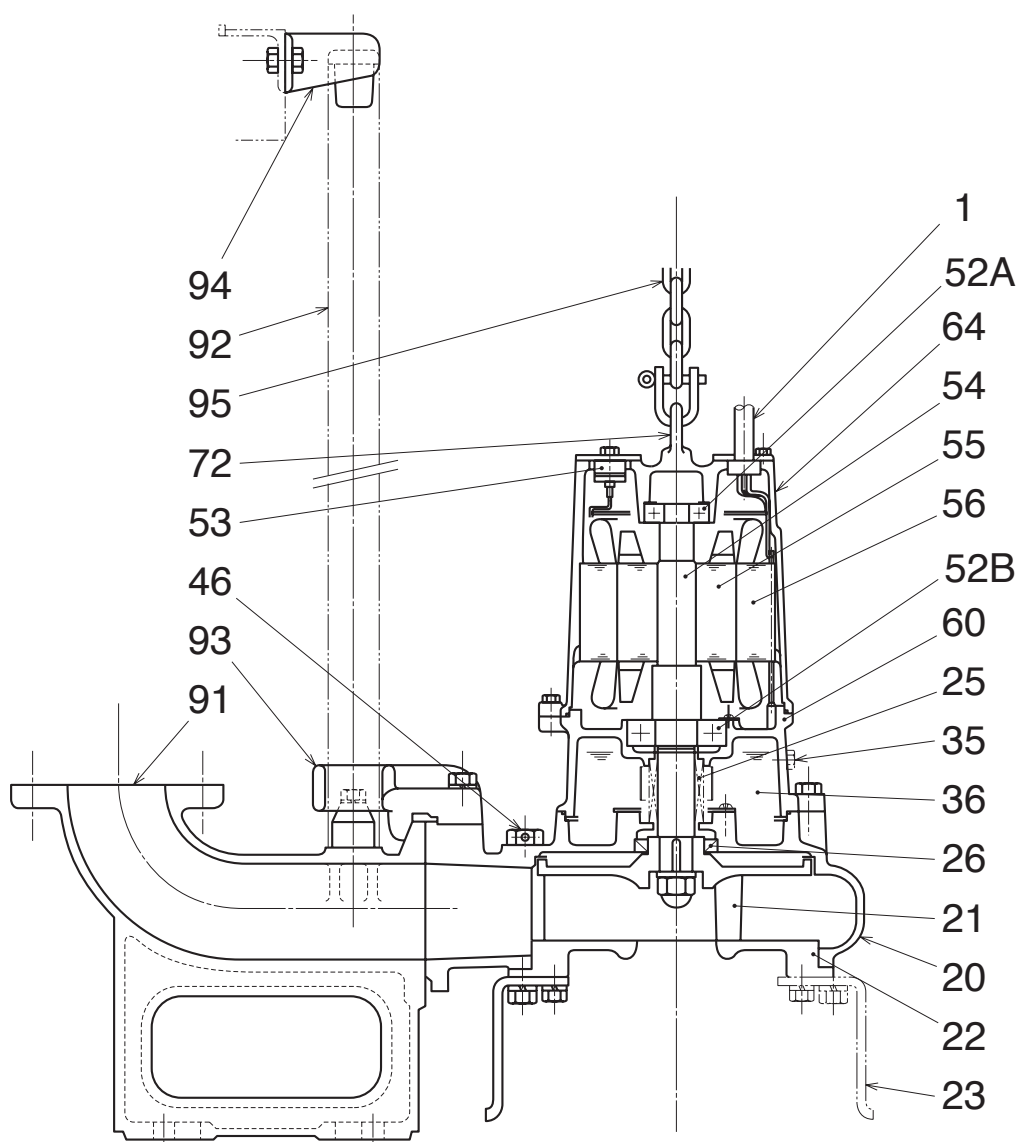


TOS100B43.7H-52

No.	Description	Qty.	Remarks	No.	Description	Qty.	Remarks
1	Cabtyre Cable	1	H07RN-F	54	Shaft	1	SUS420J2 (EN X30Cr13)
20	Pump Casing	1	FC200 (EN-GJL-200)	55	Rotor	1	
21	Impeller	1	FC200 (EN-GJL-200)	56	Stator Complete	1	
22	Suction Cover	1	FC200 (EN-GJL-200)	60	Bearing Housing	1	FC200 (EN-GJL-200)
23	Stand	3	SS400 (DIN 1.0040)	64	Motor Frame	1	FC200 (EN-GJL-200)
25	Mechanical Seal	1	H-35A	72	Lifting Eye Bolt	2	SUS304 (EN-X5CrNi18-10)
26	Oil Seal	1	TC507212	91	Duck Foot Bend	1	FC200 (EN-GJL-200)
30	Oil Lifter	1	Plastic	92	Guide Pipe (Option)	2	Galvanized Steel Pipe SGPW
35	Oil Plug	1	SUS304 (EN-X5CrNi18-10)	93	Guide Hook	1	FCD450 (EN-GJS-450-10)
36	Lubricant		Turbine Oil (ISO VG32)	94	Guide Support	1	SUS304 (EN-X5CrNi18-10)
46	Air Release Valve	1	Nylon	95	Lifting Chain	1	SS400 (DIN 1.0040)
52A	Upper Bearing	1	6304ZZC3				
52B	Lower Bearing	1	6309ZZC3				
53	Motor Protector	1					

Pump Performance Curve

100B43.7H-52

Discharge Bore	100 mm
Total Head	16,0 m
Capacity	0,60 m ³ /min
Motor Output	3,70 kW
Motor Input	4,70 kW
Phase	3
Voltage	400 V
Frequency	50 Hz
Rated Current	8,0 A
Starting Current	49,5 A
Poles	4
Revolution	S.S. 1450 r.p.m.
Starting Method	direct on line
Insulation Class	E

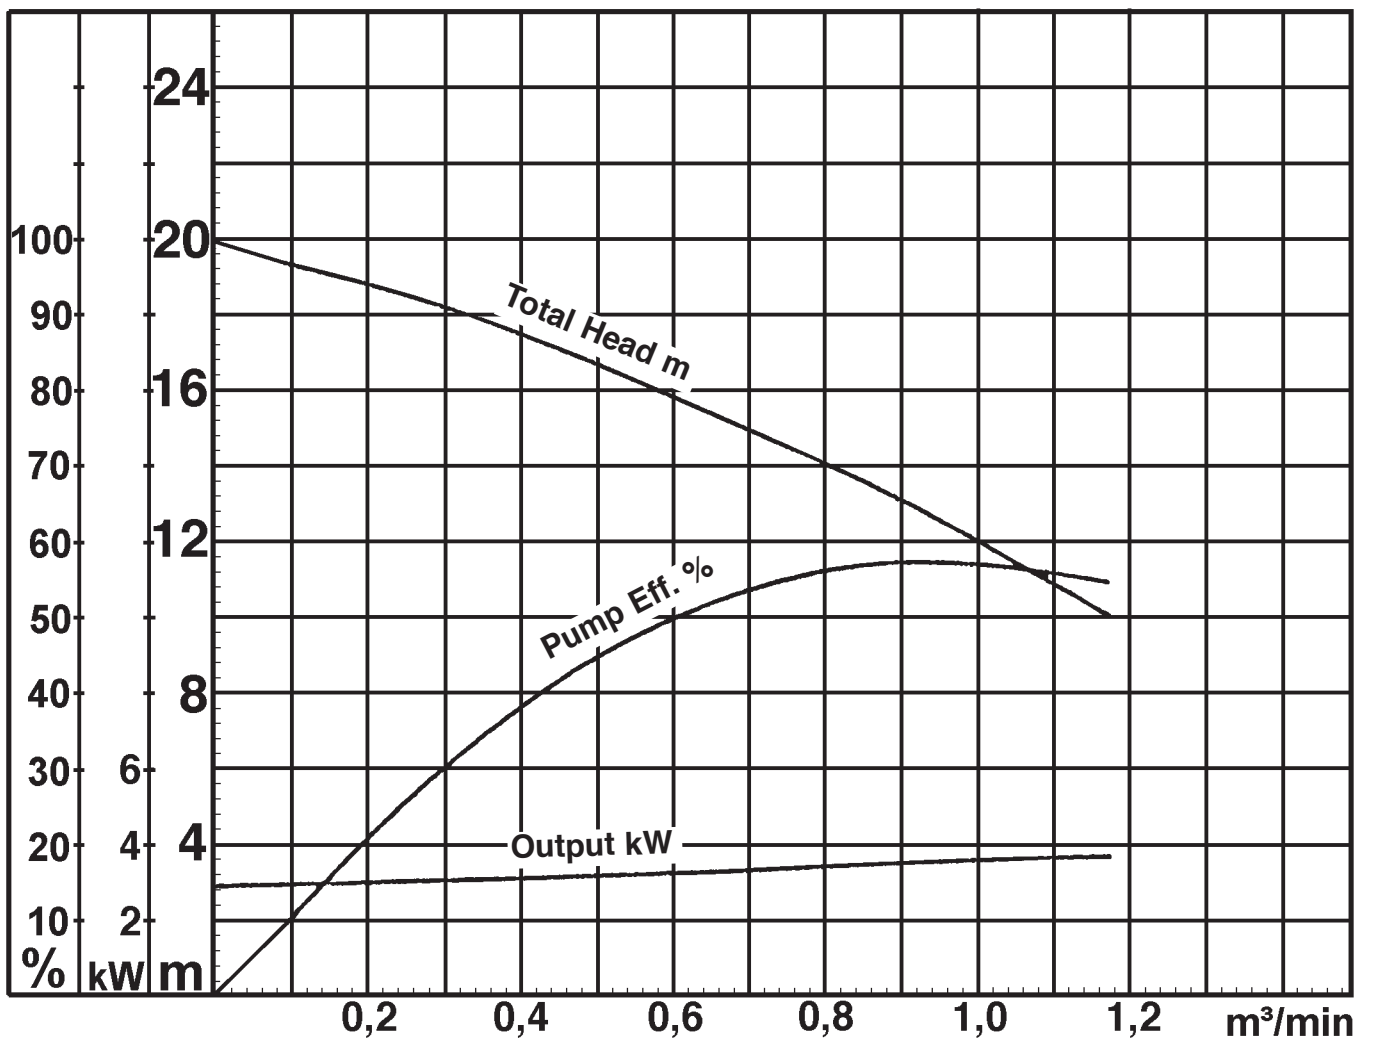

100B43.7H-52