



Data Sheet KTVE33.7-50

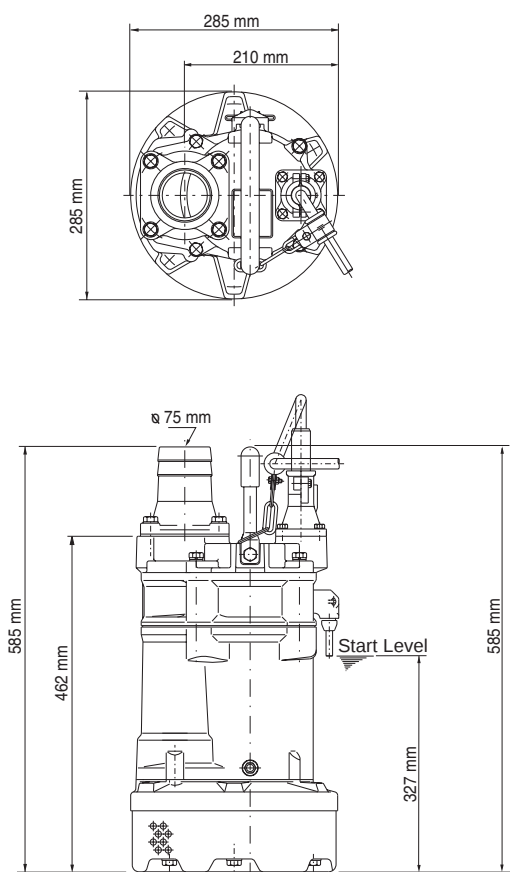

KTVE33.7-50

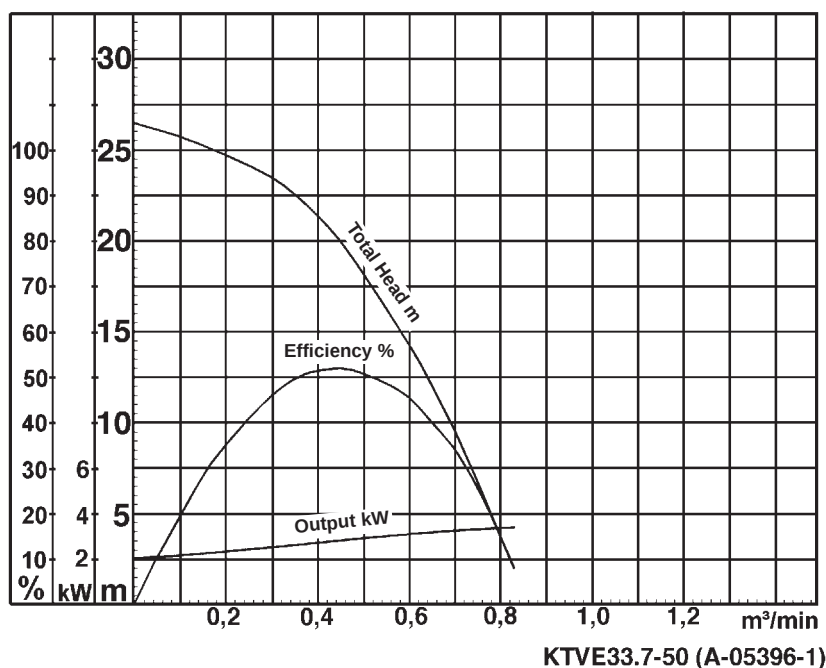

Classification

Automatic electric submersible pump
with water sensor (electrode)
Protection class IP68
Depth of submersion max. 50m
Semi-vortex impeller
Max. solid handling 8,5mm
Suitable for rain water, ground water, sand
carrying water

Electric Motor

Dry-type submersible induction motor,
Insulation class E, 2 poles, 2875 r.p.m.
Direct on line start
Voltage: 400V, 50Hz, 3-phase
Power input: 4,63kW
Power output: 3,70kW
Nominal current: 7,4A
Start current: 48,0A

Electric Cable

20m H07RN-F 4Cx1,5mm²

Motor Protection

Circle thermal protector
(snap-action bi-metal device)

Shaft Seal

Double mechanical seal in oil bath
additional lubrication by oil lifting device
Primary Seal:
silicon carbide on silicon carbide
Secondary Seal:
silicon carbide on carbon

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller: FCD700 (EN-GJS-700-2)
Casing: Synthetic rubber
Motor frame: Aluminium alloy casting ADC12
Shaft: SUS403 (EN-X6Cr13)

Discharge Connection

3" (80mm) hose coupling



Weight

39,5 kg (dry weight of the pump without cable)

Special Feature

level control by water sensors (electrodes)


Dimensional Drawing KTVE33.7-50

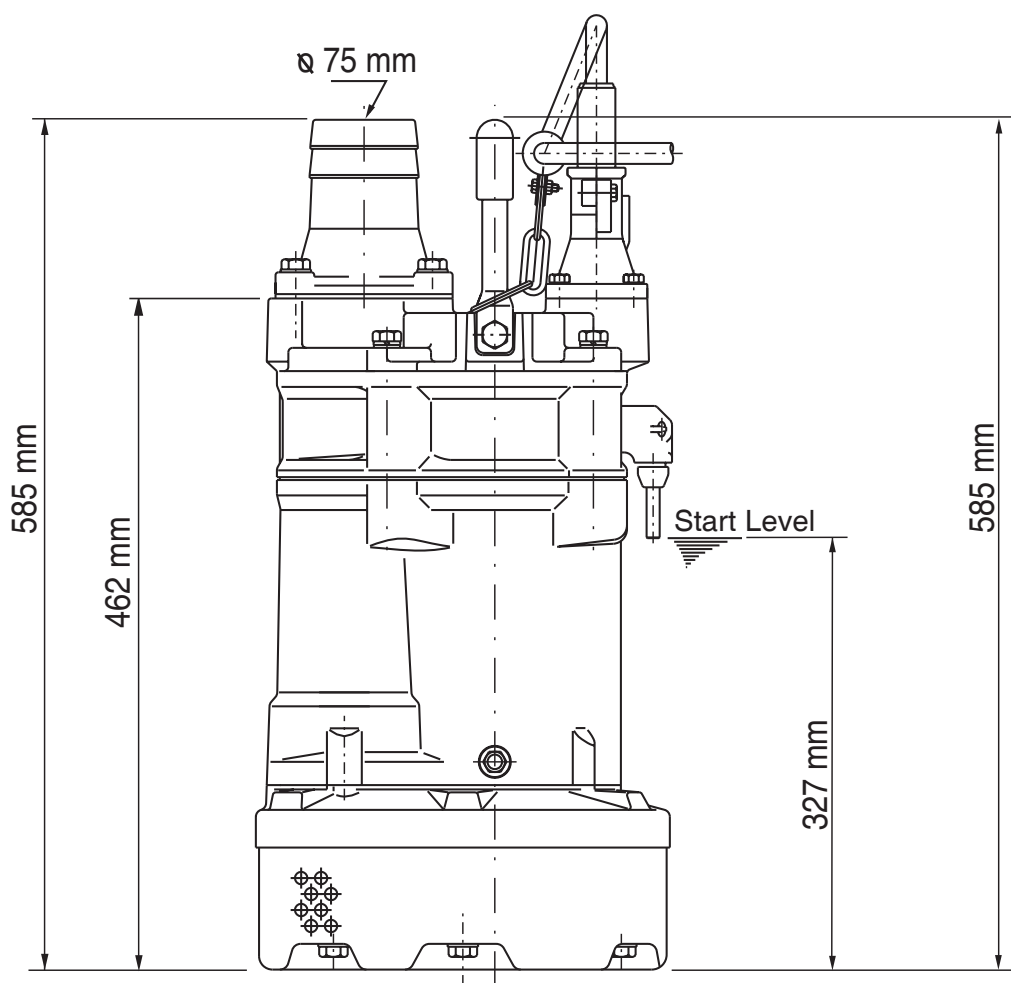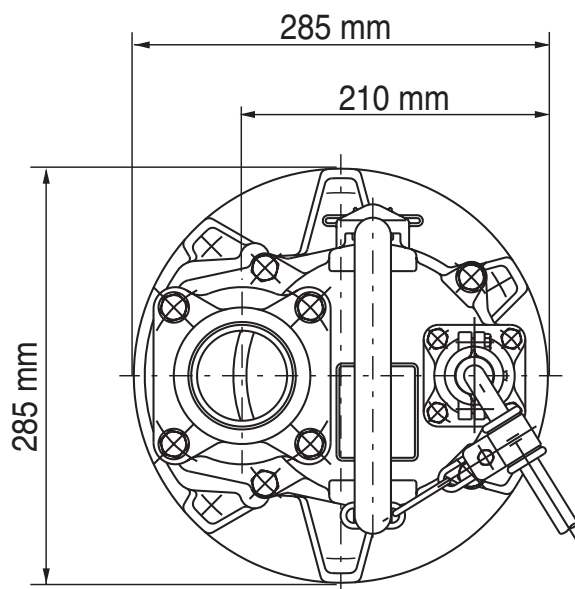

KTVE33.7-50

Sectional Drawing

KTVE33.7-50

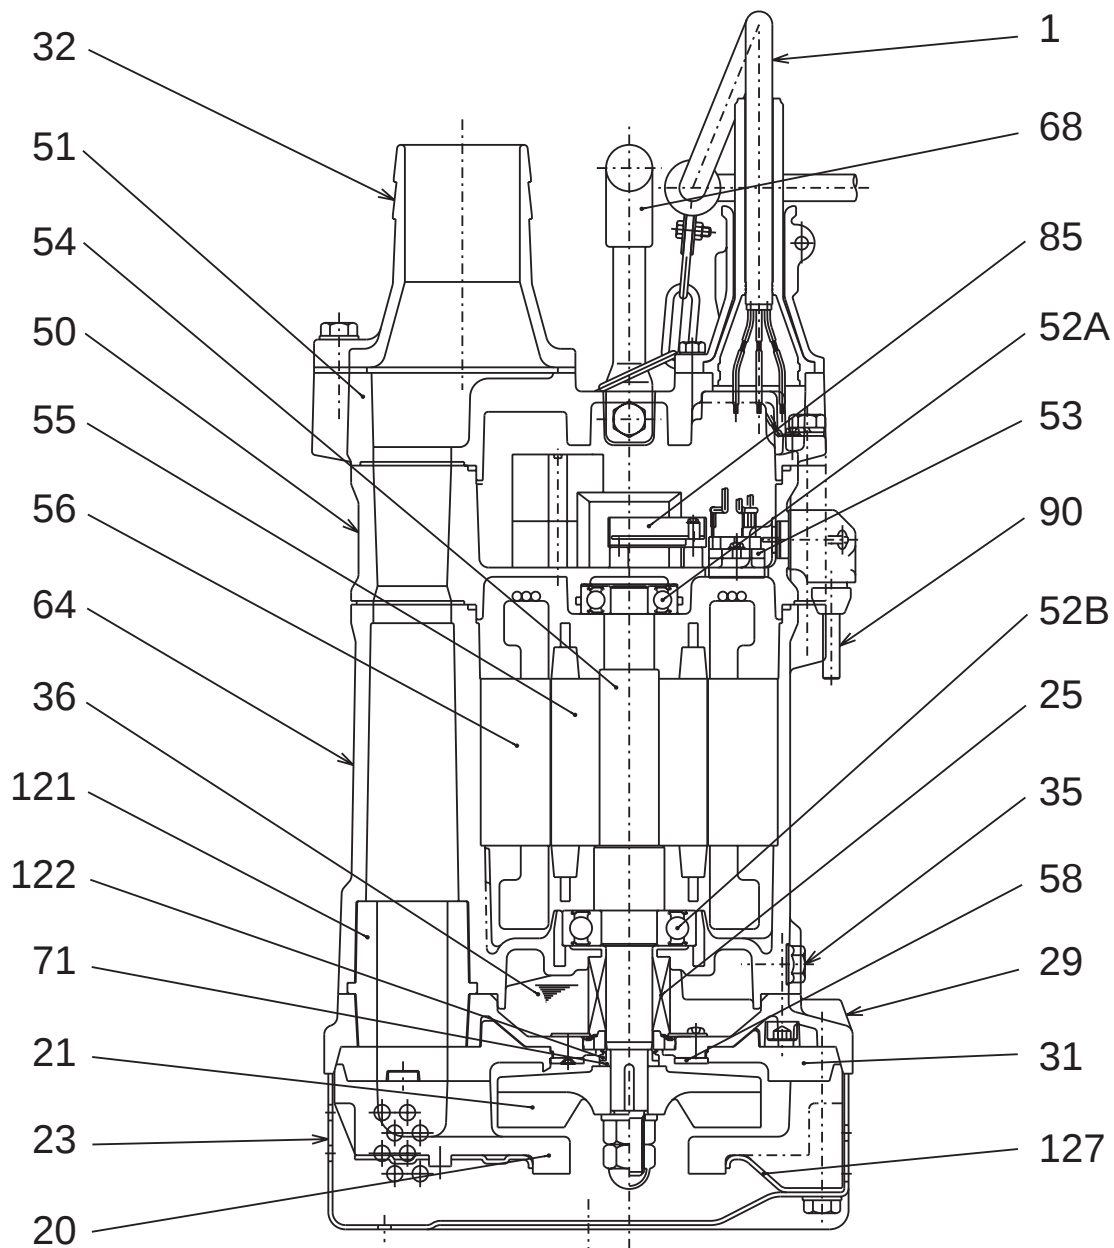


KTVE33.7-50

No.	Description	Qty.	Remarks	No.	Description	Qty.	Remarks
1	Cabtyre Cable	1	H07RN-F	53	Motor Protector	1	
20	Pump Casing	1	Butadiene/Nitrile Rubber	54	Shaft	1	SUS403 (EN-X6Cr13)
21	Impeller	1	FCD700 (EN-GJS-700-2)	55	Rotor	1	
23	Strainer	1	Steel Plate SPCC	56	Stator	1	
25	Mechanical Seal	1	H-25	58	Protection Plate	1	SUS304 (EN-X5CrNi18-10)
29	Oil Casing	1	Aluminium Alloy Casting ADC12	64	Motor Frame	1	Aluminium Alloy Casting ADC12
31	Wearing Plate	1	Butadiene/Nitrile Rubber	68	Handle	1	SGP+NBR
32	Hose Coupling	1	Aluminium Alloy Casting ADC12	71	Shaft Sleeve	1	SUS304 (EN-X5CrNi18-10)
35	Oil Plug	1	SUS304 (EN-X5CrNi18-10)	90	Electrode	1	
36	Lubricant		Turbine Oil (ISO VG32)	121	Duct Sleeve	1	Styrene Butadiene Rubber
50	Motor Bracket	1	Aluminium Alloy Casting ADC12	122	V-Seal	1	Nitrile Butadien Rubber
51	Head Cover	1	Aluminium Alloy Casting ADC12	127	Fixing Plate	1	Steel Plate SPCC
52A	Upper Bearing	1	6204ZZC3				
52B	Lower Bearing	1	6306ZZC3				

Pump Performance Curve

KTVE33.7-50

Discharge Bore	80 mm
Total Head	18,0 m
Capacity	0,50 m ³ /min
Motor Output	3,70 kW
Motor Input	4,63 kW
Phase	3
Voltage	400 V
Frequency	50 Hz
Rated Current	7,4 A
Starting Current	48,0 A
Poles	2
Revolution	S.S. 2875 r.p.m.
Starting Method	direct on line
Insulation Class	E

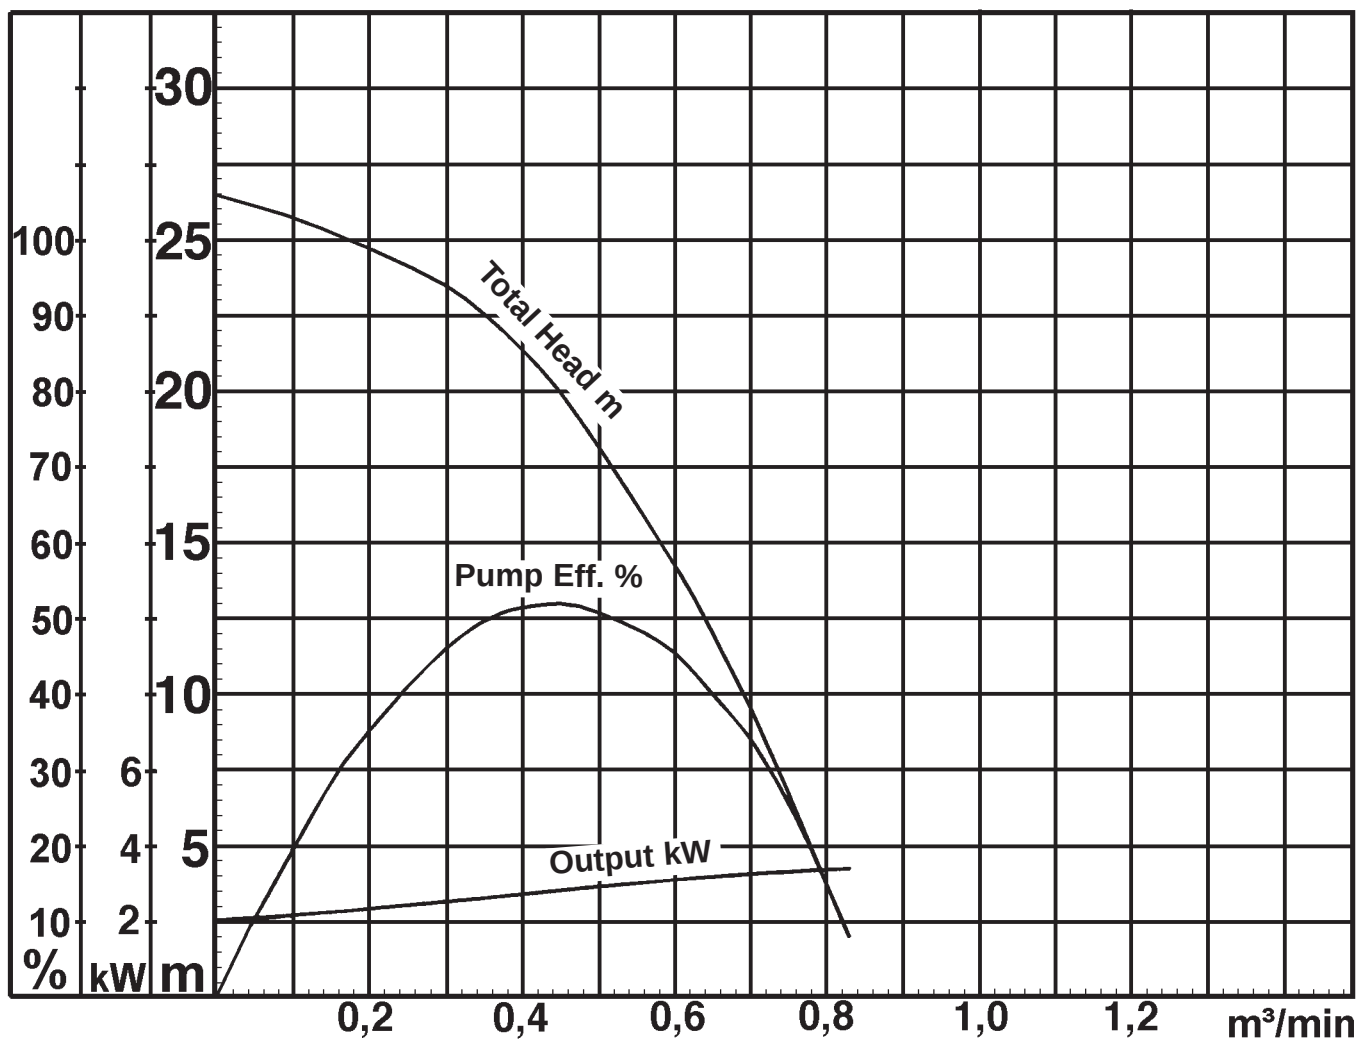

KTVE33.7-50 (A-05396-1)