

PRODUCT GUIDE

AIR POWERED PUMP TECHNOLOGY
MANUFACTURED IN JAPAN



ABOUT YAMADA...



Yamada Europe B.V.

Aquamarijnstraat 50
7554 NS Hengelo
The Netherlands

Phone +31 (0)74-242 2032

Fax +31 (0)74-242 1055

E-mail: sales@yamada-europe.com

Web: www.yamada-europe.com

CONTENTS

Yamada Corporation has been a leading producer of industrial equipment since 1905, and for pneumatic pumps for over 77 years. As a leader in pneumatic pumping technology, Yamada is known in many industries worldwide for its innovative products, superior quality and unmatched reliability. Yamada has an impressive history of delivering new products and solving customer problems which confirm Yamada's position as the industry leader.

Yamada's reputation for manufacturing top quality products, allied with continuing efforts in research and development have created a strong foundation for market leadership. As an ISO 9001 certified corporation, stringent quality procedures are followed throughout the manufacturing process, including liquid testing of every pump prior to shipping.

Yamada Corporation has its primary headquarters in Tokyo, Japan, with manufacturing based in Sagami-hara City. Assembly facilities are located in Chicago, Illinois, USA and Hengelo, The Netherlands; an office in Thailand; and Shanghai is covering the emerging markets of China. These offices are supportcenters for over 400 Yamada distributors worldwide.

Yamada Europe B.V., a wholly owned subsidiary of Yamada Corporation, was established in 1986 to provide sales and service and support for Europe, the Middle East and Africa, through a highly trained network of distributors.

Our professional staff provides:

- Customer service
- Product training
- Research & development
- Parts and service for all Yamada pumps
- Application engineering
- Industry knowledge

With a wide customer network, Yamada is in position to service the global market needs worldwide. Contact Yamada Europe for the closest distributor location.

We build our pumps with quality and innovation. This is the cornerstone of the Yamada design and manufacturing process.

For additional information, product literature, and drawings please visit www.yamada-europe.com or contact our sales team at +31 (0)74-24 220 32.



Engineered to Perform	4
Air Valve Technology	5
Ten Features of a Yamada Diaphragm Pump	6
ATEX	6
Understanding Performance Curves	6
NDP-5 Series Pumps	7
DP-10/15 Series Pumps	8
NDP-10/15 Series Pumps	10
NDP-20 Series Pumps	12
NDP-25 Series Pumps	14
NDP-40 Series Pumps	16
NDP-50 Series Pumps	18
NDP-80 Series Pumps	20
Dimensional Drawings	22
High Pressure 2:1 Pumps	26
Manifold Options	26
XDP Series Pumps	27
Powder Series Pumps	27
Drum Series Pumps	28
NDP-32 Serie Pump	28
FDA Compliant Pumps	29
DM(B)(X) Series Pumps	29
Solids Handling Pump	30
Liquid Level Controller	31
Dry-Run Detection	31
Pulsation Dampeners	32
Pump Diaphragms	33
Min/Max Fluid Temperature to Pump	33
Optional Coatings	34
Installation	34
Additional Options	35

ENGINEERED TO PERFORM

Fully bolted leak free mating surfaces

All Yamada pumps incorporate registered fit bolted construction, which simplifies reassembly after maintenance. No leak-prone clamp bands are utilized.

One air valve fits all

The NDP-40, 50 & 80 series pumps utilize one common air valve assembly, reducing parts inventory and assembly confusion. The NDP-20 & 25 have a common air valve as well. One air valve concept is used in all Yamada NDP series pumps!

Outside accessible


Inspection or maintenance of every Yamada air valve can be performed without removing the pump from service.

Pilot valve

Unique design is an individual modular pilot valve that actuates the air valve. It is maintenance-free, with no cumbersome snap rings or lubricated dynamic o-rings to replace or repair.

Diaphragm dynamics

Extensive research has led to the development of an optimal stroke length that maximizes diaphragm life and performance while minimizing downtime and maintenance costs.

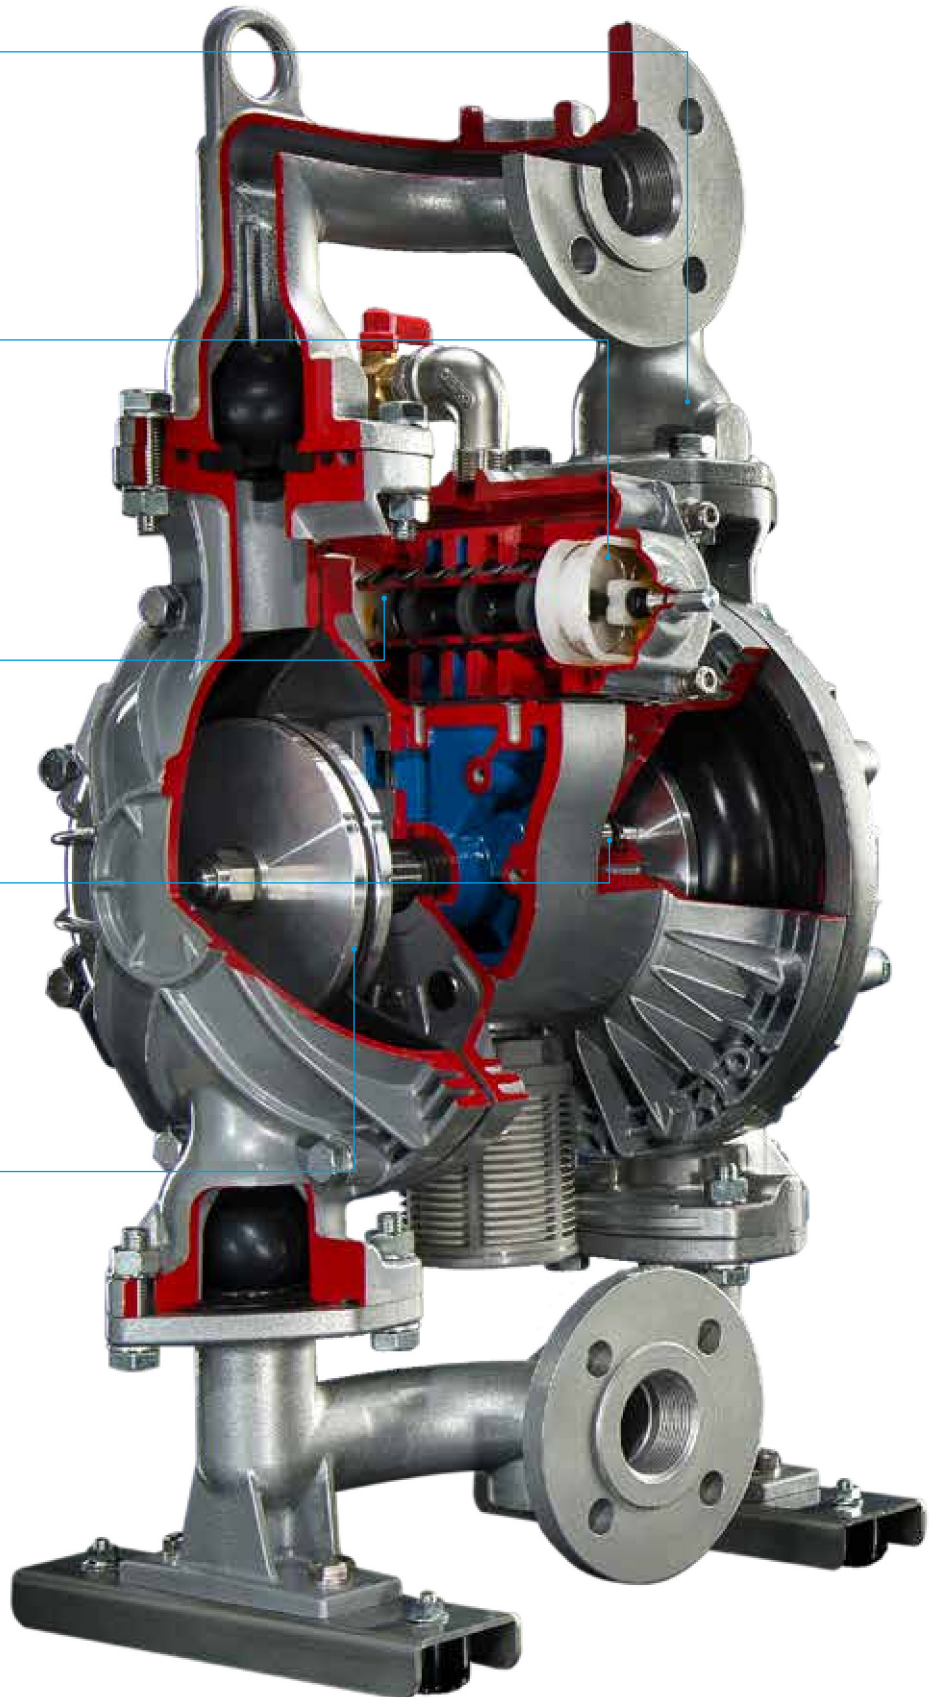

BUILT TO LAST

AIR VALVE TECHNOLOGY



Air valve technology is the heart of the air-powered double diaphragm pump and determines reliability. Yamada holds three patents on its field proven valve and enjoys a superior reputation throughout the industry.

Unified Air Valve Concept

To simplify, Yamada offers two common size air valve assemblies within five sizes of pumps (3/4" & 1" pumps and 1-1/2" 2" & 3" pumps) further reducing reassembly confusion and parts inventory. We try to unify to reduce multiple air valve designs and revisions. Whether your pumps are functioning continuously or intermittently; at high or low pressure; using dirty or clean air; Yamada offers one field proven design.

Truly Non-Lubricated Air Valve

The patented air valve on all NDP series pumps never requires lubrication or pre-packing. The advanced design eliminates the need for external lubrication which can lead to pumpage contamination and maintenance headaches. Yamada is proud to be the originator of non-lubricated air valve technology for air-powered double diaphragm pumps.


Component Replaceable

All Yamada air valves can be restored with individual components, without requiring complete valve and housing replacement.

Non-Stalling

A patented non-centering, spring-assisted shifter is incorporated into every NDP Series pump, ensuring a positive shift every time.

The 304 stainless steel C-springs provide exceptional durability and longevity and are tested to last over **300 million cycles!** The spring assist also aides in long dead head (closing a valve in the discharge without closing the air pressure) applications for reliable startup.

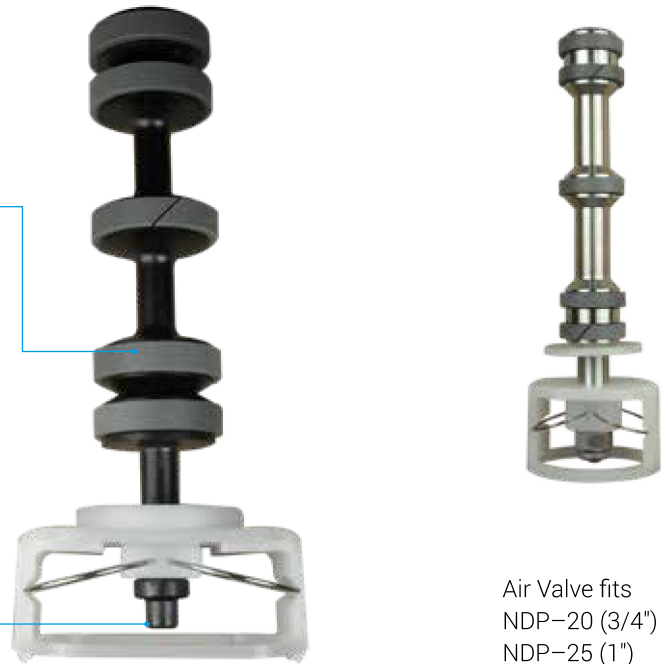

Common-size air valve assemblies reduce parts confusion.

Air Valve fits
NDP-20 (3/4")
NDP-25 (1")
Series Pumps

Air Valve fits
NDP-40 (1-1/2")
NDP-50 (2")
NDP-80 (3")
Series Pumps



For additional information on Yamada products and services, visit www.yamada-europe.com

TEN FEATURES OF A YAMADA DIAPHRAGM PUMP

1. Handles a wide variety of fluids with high solids content: No close fitting or rotating parts so liquid with high solids content and/or size can be easily pumped.
2. Self Priming: The Yamada pump design (incorporating internal check valves) allows for high suction lift even at dry start-up and with heavier fluids.
3. Ability to run dry: No close fittings or sliding parts are at risk—the pump can run dry without damage.
4. Variable flow rate and discharge pressure: Yamada pumps will run at any setting within their operating range simply by adjusting the air inlet pressure and system conditions. One pump can fit a broad spectrum of applications.
5. Portable/Simple Installation: Yamada pumps transport easily to the application site. Simply connect your air supply line and liquid lines; the pump is ready to perform. There are no complex controls to install and operate.
6. Dead Head: Because the discharge pressure can never exceed air inlet pressure, the discharge line can be closed with no damage or wear. The pump will simply slow down and stop.
7. Shear Sensitive: The gentle nature and minimal parts contact with the liquid makes Yamada pumps an excellent choice for shear sensitive fluids.
8. Explosion Proof: Yamada pumps are operated by compressed air, therefore, they are intrinsically safe.
9. Submersible: If external components are compatible—Yamada pumps can be submerged in the liquid by simply running the exhaust line above the liquid level.
10. Pumping efficiency remains constant: There are no rotors, gears, or pistons, which wear over time and lead to the gradual decline in performance/flow rate.

For additional information on Yamada products & services, visit www.yamada-europe.com.

ATEX

Yamada offers also pumps and dampeners according ATEX 114 Explosion safety guidelines. For additional information please contact our sales team at +31 (0)74-24 220 32



UNDERSTANDING PERFORMANCE CURVES

To determine compressed air requirements and proper size for a Yamada Air-powered Double Diaphragm Pump, two elements of information are required:

1. Required Flow Rate (l/min or GPM)
2. Total Dynamic Head (back pressure)

10 m water height is 1 Bar (0,1 MPa) back pressure.


As an example, consider an NDP-40 Series Pump with rubber diaphragms performance curve. Pump pumping at 250 l/min (66 GPM) (I) at 10 m (33 Feet) (—) back pressure.

Point “●” on the performance curve is where the desired Flow Rate (l/min or GPM) and Total Dynamic Head points intersect. This point determines compressed air requirements for the particular pump.

At performance point “●”, the pump will require approximately 3 Bar (0,3MPa or 45 PSI) air inlet pressure.

To arrive at this figure, follow the solid curve (—) to the left to read the air pressure rating in MPa.

By looking at the dashed line (---), it is determined the pump will require approximately 1500 l/min of air volume.

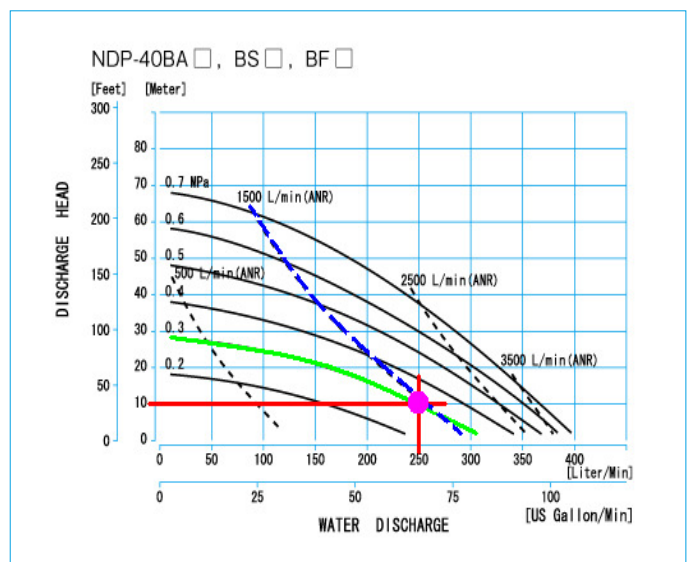

0,1 MPa	= 1 Bar
1 Bar	= 14,5 PSI
1 l	= 0,26 Gallon (gal.)
1 m	= 3,28 Feet (ft.)
1 m ³ /h	= 0,58 SCFM
1000 l/min	= 34 SCFM
SCFM	= Standard Cubic Feet Per Minute

NDP-5 SERIES

Maximum Capacity 11,7 l/min (3,1 GPM)
Port Size 1/4" (5 mm)



NDP-5 Polypropylene

Dimensions:
156 mm W x 152 mm H
Net Wt.: 1,36 kg
Shipping Wt.: 1,81 kg

NDP-5 Conductive Kynar®

Dimensions:
156 mm W x 152 mm H
Net Wt.: 1,67 kg
Shipping Wt.: 2,1 kg



NDP-5 Conductive Acetal

Dimensions:
156 mm W x 152 mm H
Net Wt.: 1,67 kg
Shipping Wt.: 2,1 kg



NDP-5 Stainless Steel

Dimensions:
155 mm W x 149 mm H
Net Wt.: 2,68 kg
Shipping Wt.: 3,1 kg



NDP-5 Aluminum

Dimensions:
155 mm W x 149 mm H
Net Wt.: 1,5 kg
Shipping Wt.: 1,9 kg

NDP-5 SPECIFICATIONS

Port Dimensions

Intake & discharge connection:	1/4" 5 mm Female Rc
Air inlet (incl. ball valve):	1/4" 5 mm Female Rc
Air exhaust (internal silencer):	3/8" 10 mm Female Rc

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

29 cc

Maximum Cycles Per Minute: 400

Maximum Dry Suction Lift: 1,5 m


Air Motor

Standard: Ryton® air motor

Model Number Nomenclature

Polypropylene (PPG)	NDP-5FPT
Conductive Kynar® (PVDF)	NDP-5FVT
Conductive Acetal (POM)	NDP-5FDT
Aluminum (ADC-12)	NDP-5FAT
Stainless Steel (316)	NDP-5FST


NDP-5 serie Performance Curve

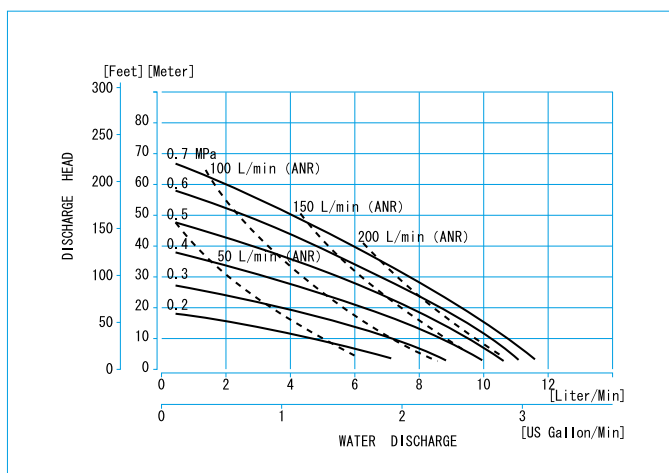

DP-10 SERIES / DP-15 SERIES

Maximum Capacity 22 l/min
Port Size 3/8" (10 mm)

Maximum Capacity 28 l/min
Port Size 1/2" (15 mm)

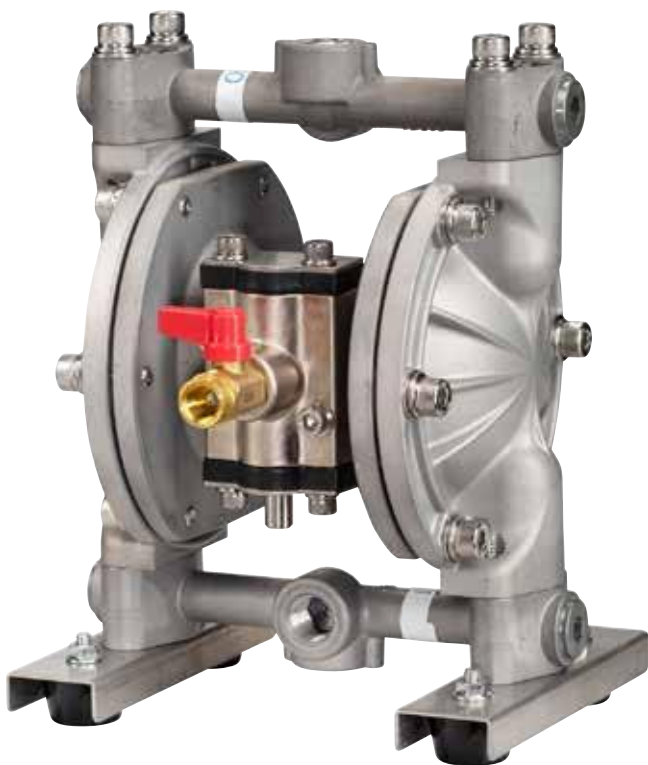

DP-10 Aluminum

Dimensions:
186 mm W x 241 mm H
Net Wt.: 3,6 kg
Shipping Wt.: 4, 5 kg

DP-10 Polypropylene

Dimensions:
196 mm W x 196 mm H
Net Wt.: 3,1 kg
Shipping Wt.: 4,0 kg



DP-15 Polypropylene

Dimensions:
246 mm W x 297 mm H
Net Wt.: 4,0 kg
Shipping Wt.: 5,4 kg



DP-10 Stainless Steel

Dimensions:
186 mm W x 241 mm H
Net Wt.: 5,3 kg
Shipping Wt.: 6,2 kg



DP-10 / DP-15 SERIES SPECIFICATIONS

DP-10 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	3/8" 10 mm Female Rc
Aluminum (ADC-12)	3/8" 10 mm Female Rc
Stainless Steel (316)	3/8" 10 mm Female Rc

DP-15 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	1/2" 15 mm Female Rc
Conductive Acetal (POM)	1/2" 15 mm Female Rc

Air Inlet/Exhaust

Air inlet (incl. ball valve):	1/4" 5 mm Female Rc
Air exhaust (incl. silencer):	3/8" 10 mm Female Rc

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

DP-10: 76 cc

DP-15: 93 cc

Maximum Cycles Per Minute

All diaphragms: 300

Maximum Size Solid

1,0 mm (1/32")

Maximum Dry Suction Lift

All diaphragms: 3 m

Air Motors

Standard: Aluminum


Optional: Teflon®-coated or Electroless Nickel Plate

Notes:


Hytre®-fitted pumps include Buna-N wetted o-rings.

Santoprene®-fitted pumps include EPDM wetted o-rings.


DP-10 Series Performance Curve

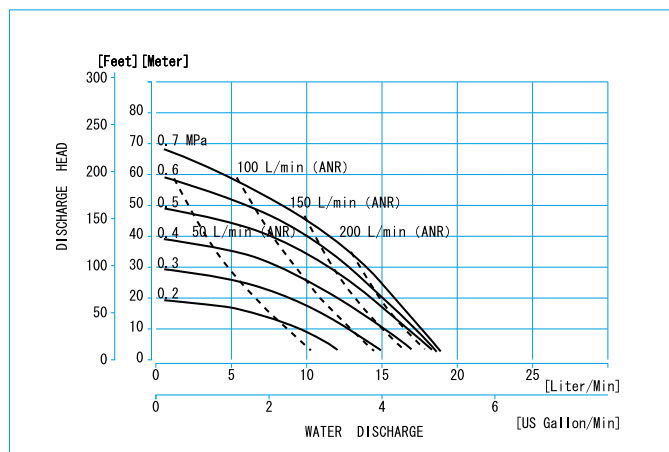

DP-15 Series Performance Curve

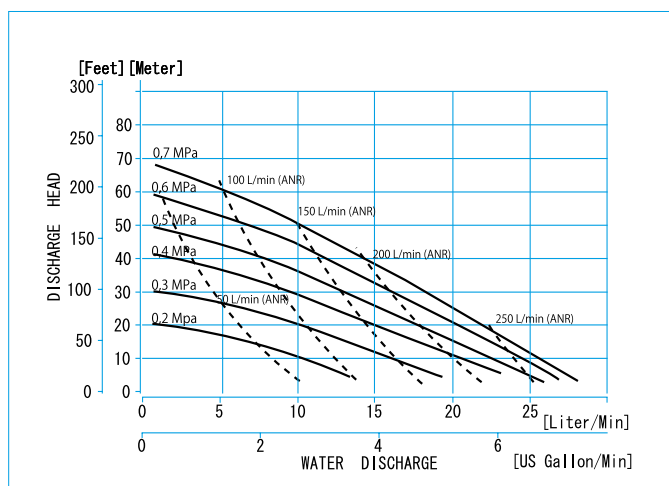

Model Number Nomenclature

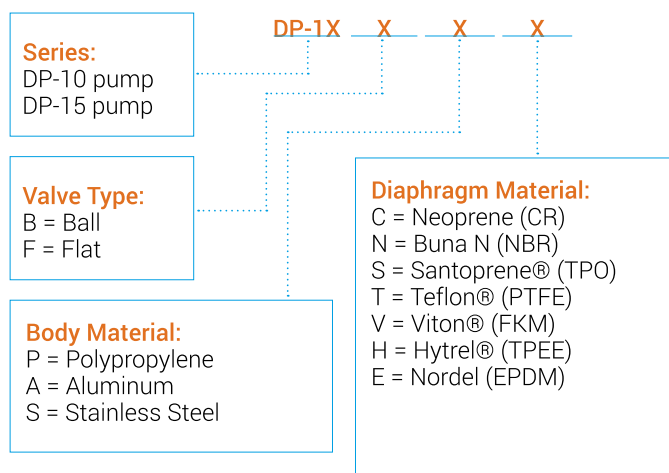

DP-15 standard with flat valves.

Ball valve is optional.

Additional options listed on page 35.

NDP-10 SERIES / NDP-15 SERIES

Maximum Capacity 22 l/min
Port Size 3/8" (10 mm)

Maximum Capacity 51 l/min
Port Size 1/2" (15 mm)

NDP-10 Polypropylene

Dimensions:
185 mm W x 190 mm H
Net Wt.: 2,74 kg
Shipping Wt.: 3,5 kg



NDP-15 Polypropylene

Dimensions:
220 mm W x 298 mm H
Net Wt.: 3,5 kg
Shipping Wt.: 4,3 kg

NDP-15 Conductive Kynar®

Dimensions:
220 mm W x 298 mm H
Net Wt.: 4,3 kg
Shipping Wt.: 5,0 kg



NDP-15 Aluminum

Dimensions:
220 mm W x 272 mm H
Net Wt.: 4,0 kg
Shipping Wt.: 5,0 kg



NDP-15 Stainless Steel

Dimensions:
212 mm W x 246,4 mm H
Net Wt.: 6,2 kg
Shipping Wt.: 7,0 kg



NDP-10 / NDP-15 SERIES SPECIFICATIONS

NDP-10 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	3/8" 10 mm Female Rc
---------------------	----------------------

NDP-15 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	1/2" 15 mm Female Rc
Conductive Kynar® (PVDF)	1/2" 15 mm Female Rc
Conductive Acetal (POM)	1/2" 15 mm Female Rc
Aluminum (ADC-12)	1/2" 15 mm Female Rc
Stainless Steel (316)	1/2" 15 mm Female Rc

Air Inlet/Exhaust

Air inlet (incl. ball valve):	1/4" 5 mm Female Rc
Air exhaust (internal silencer):	3/8" 10 mm Female Rc

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

NDP-10: 50 cc

NDP-15: 128 cc

Maximum Cycles Per Minute

All diaphragms: 400

Maximum Size Solid

1,0 mm (1/32")

Maximum Dry Suction Lift

NDP-10: All diaphragms: 1,5 m

NDP-15: Flat-type check valve: 2,4 m
Ball-type check valve: 1,5 m

Air Motor

Standard: Ryton® air motor

Notes:

Hytrel®-fitted pumps include Buna-N wetted o-rings.


Santoprene®-fitted pumps include EPDM wetted o-rings.

Kynar® (PVDF) pumps fitted with Santoprene®, Hytrel®, or


Teflon® include Teflon® o-rings.

Flat valves are standard PTFE.


NDP-10 Series Performance Curve

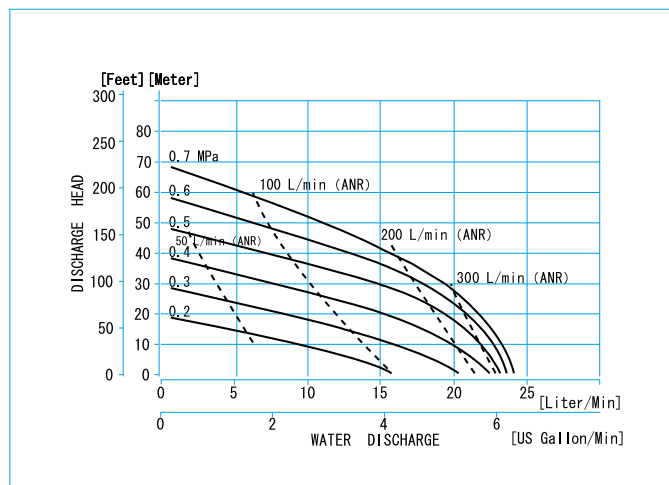

NDP-15 Series Performance Curve

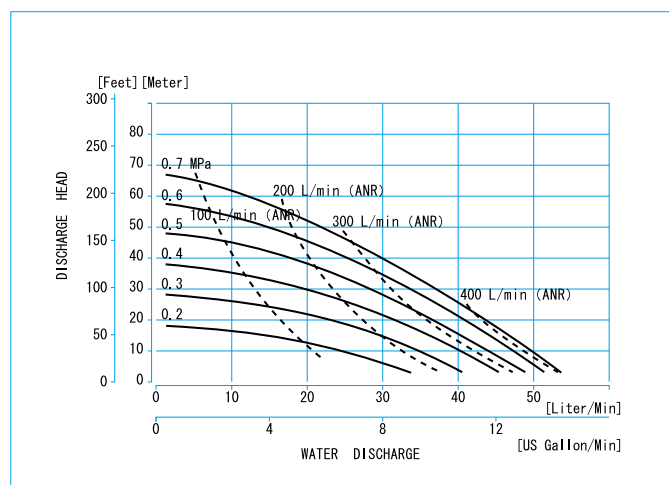

Model Number Nomenclature

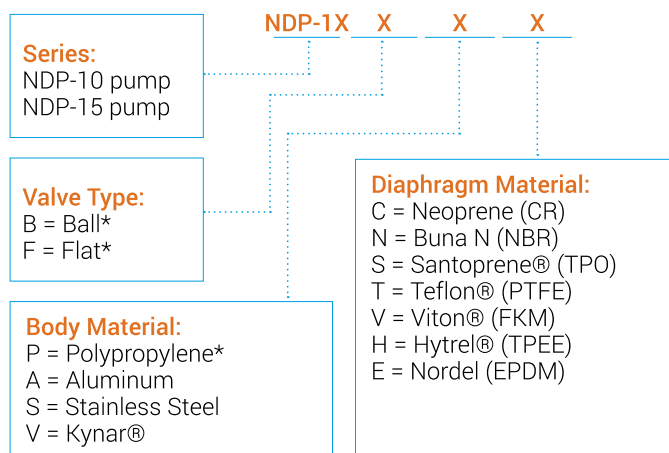

* NDP-10 standard in PPG execution only

* Flat valves standard for NDP-15 Plastic pumps

* Ball valves optional for PPG pumps NDP-15 only

Additional options listed on page 35.

NDP-20 SERIES

Maximum Capacity 120 l/min
Port Size 3/4" (20 mm)



NDP-20 Aluminum

Dimensions:
249 mm W x 320 mm H
Net Wt.: 9,0 kg
Shipping Wt.: 10,4 kg

NDP-P20 Polypropylene-Rc

Dimensions:
316 mm W x 368 mm H
Net Wt.: 8,2 kg
Shipping Wt.: 10,2 kg



NDP-P20 Polypropylene-DN Flange

Dimensions:
316 mm W x 375 mm H
Net Wt.: 8,2 kg
Shipping Wt.: 10,2 kg



NDP-20 Stainless Steel

Dimensions:
249 mm W x 320 mm H
Net Wt.: 13,9 kg
Shipping Wt.: 14,5 kg



NDP-20 SERIES SPECIFICATIONS

Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	3/4" 20 mm Female Rc
Aluminum (ADC-12)	3/4" 20 mm Female Rc
Stainless Steel (316)	3/4" 20 mm Female Rc
Air inlet (incl. ball valve):	3/8" 10 mm Female Rc
Air exhaust (incl. silencer):	3/4" 20 mm Female Rc

DN & ANSI Flange also available—consult Yamada.

Notes: Flange connections are equivalent to DN 20 PN 10 and JIS 10K 20A and ANSI 150 3/4 B

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

Rubber diaphragm: 615 cc

PTFE diaphragm: 539 cc

Maximum Cycles Per Minute

Rubber diaphragm: 195

PTFE diaphragm: 195

Maximum Size Solid

2,0 mm (1/16")

Maximum Dry Suction Lift

Rubber-fitted pump capability: 5,5 m

Air Motors

Metal pumps standard with aluminum motor.

Options for aluminum motor: Teflon®-coated protection

Electroless Nickel plate

Plastic pumps standard with PPG motor.


PPG motor also optional for metal pumps.

Notes:



Hytel®-fitted pumps include Buna-N wetted o-rings.

Santoprene®-fitted pumps include EPDM wetted o-rings.



Model Number Nomenclature

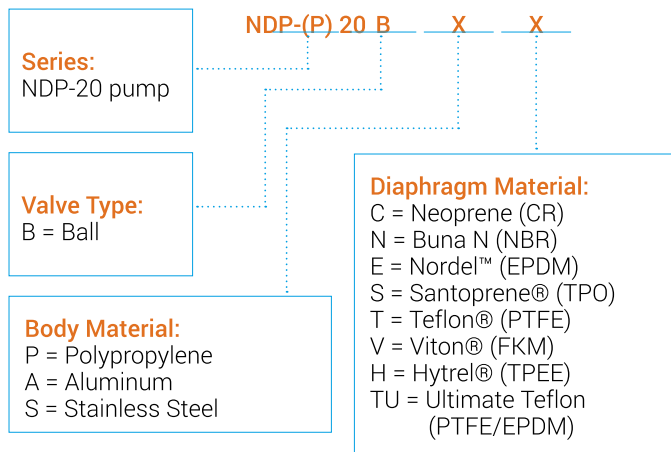

Metal Pump Performance Curve

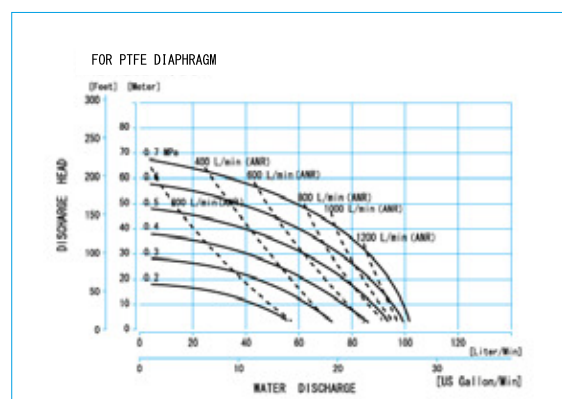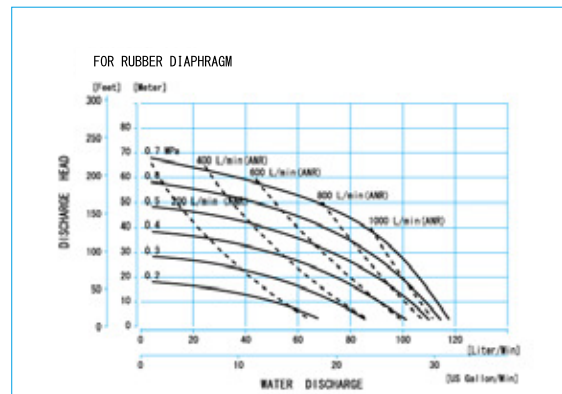

Plastic Pump Performance Curve

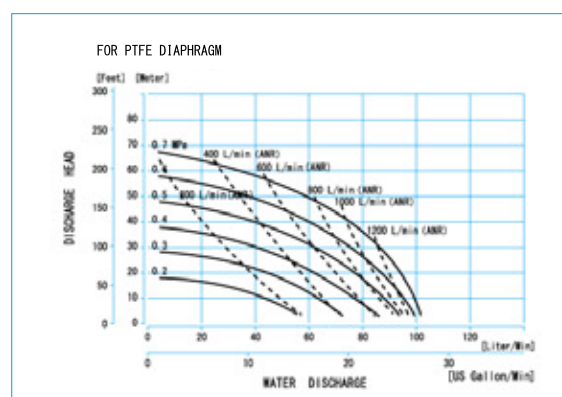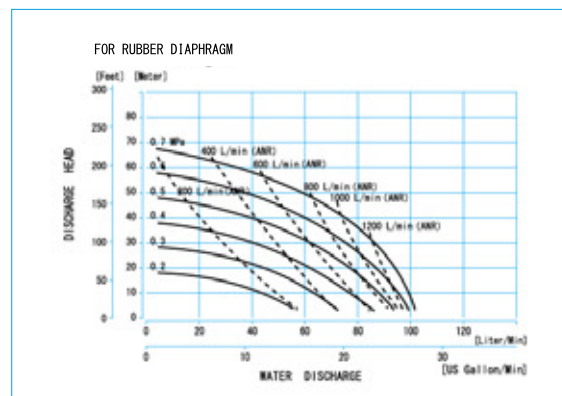

Additional options listed on page 35.

NDP-25 SERIES

Maximum Capacity 170 l/min
Port Size 1" (25 mm)



NDP-P25 Polypropylene –DN Flange
Dimensions: 366 mm W x 422 mm H
Net Wt.: 10,9 kg
Shipping Wt.: 12,6 kg

NDP-P25 Polypropylene –Rc
Dimensions:
366 mm W x 429 mm H
Net Wt.: 10,9 kg
Shipping Wt.: 12,6 kg



NDP-25 Conductive Kynar®-Rc
Dimensions:
366 mm W x 429 mm H
Net Wt.: 13,4 kg
Shipping Wt.: 15,0 kg



NDP-P25 Kynar®-DN Flange
Dimensions:
366 mm W x 442 mm H
Net Wt.: 13,4 kg
Shipping Wt.: 15,0 kg



NDP-25 Aluminum
Dimensions: 287 mm W x 383 mm H
Net Wt.: 13,0 kg
Shipping Wt.: 14,0 kg

NDP-25 Stainless Steel
Dimensions: 287 mm W x 383 mm H
Net Wt.: 19,9 kg
Shipping Wt.: 21,0 kg

NDP-25 Cast Iron
Dimensions: 287 mm W x 383 mm H
Net Wt.: 19,9 kg
Shipping Wt.: 21,0 kg



NDP-25 SERIES SPECIFICATIONS

Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	1" 25 mm Female Rc
Conductive Kynar® (PVDF)	1" 25 mm Female Rc
Aluminum (ADC-12)	1" 25 mm Female Rc
Stainless Steel (316)	1" 25 mm Female Rc
Cast Iron	1" 25 mm Female Rc
Air inlet (incl. ball valve):	3/8" 10 mm Female Rc
Air exhaust (incl. silencer):	3/4" 20 mm Female Rc

DN & ANSI Flange also available—consult Yamada.

Notes: Flange connections are equivalent to DN 25 PN 10 and JIS 10K 25A

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

Rubber diaphragm: 833 cc

PTFE diaphragm: 787 cc

Maximum Cycles Per Minute

Rubber diaphragm: 210

PTFE diaphragm: 210

Maximum Size Solid

4,8 mm (3/16")

Maximum Dry Suction Lift

Rubber-fitted pump capability: 5,5 m

Air Motors:

Metal pumps standard with aluminum motor.

Options for aluminum motor: Teflon®-coated protection
Electroless Nickel plate

Plastic pumps standard with PPG motor.

PPG motor also optional for metal pumps.

Anodic coated aluminum motor for ATEX conform PVDF pump.

Notes:

Hytel®-fitted pumps include Buna-N wetted o-rings.


Santoprene®-fitted pumps include EPDM wetted o-rings.

Kynar® (PVDF) pumps:



fitted with Santoprene® includes: santoprene balls and PTFE o-rings.

fitted with Hytel® includes: hytel balls and PTFE o-rings.



Model Number Nomenclature

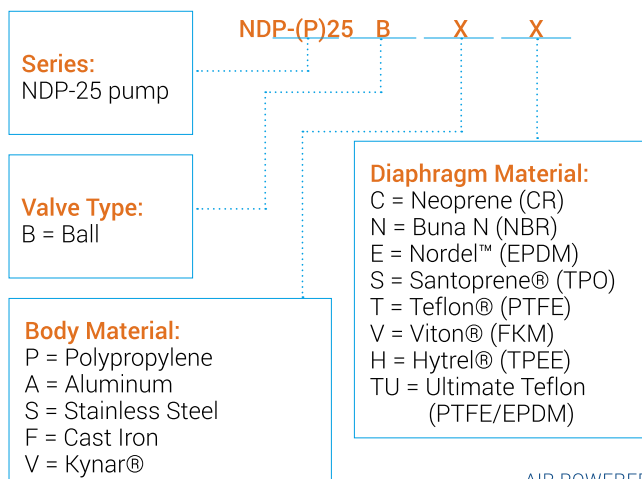

Metal Pump Performance Curve

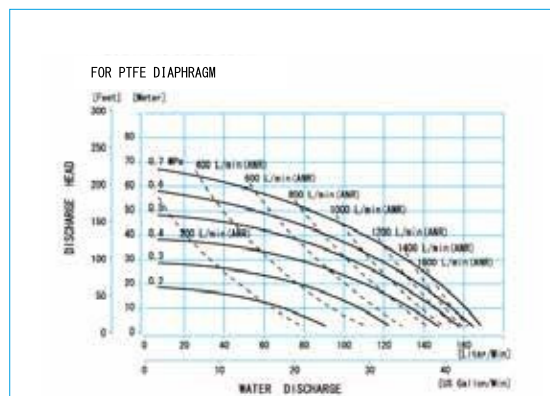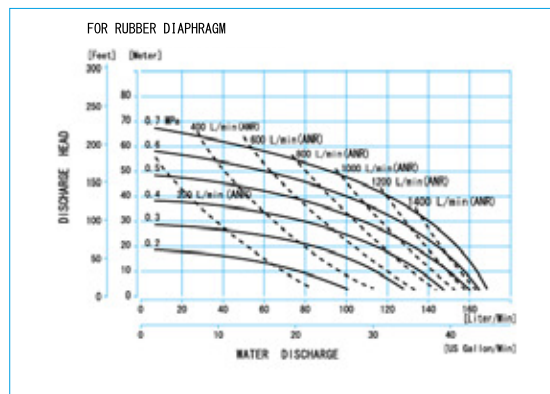

Plastic Pump Performance Curve

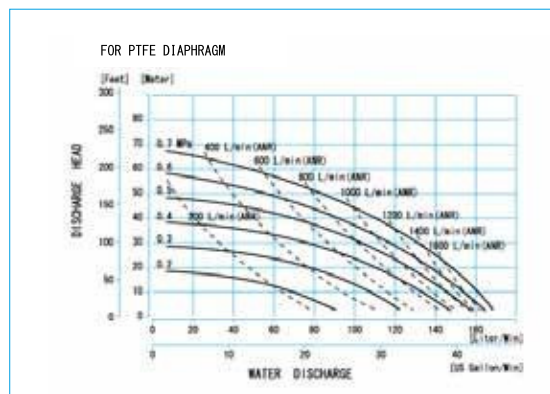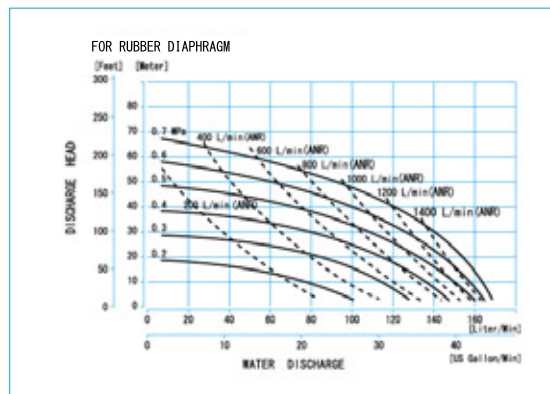

Additional options listed on page 35.

NDP-40 SERIES

Maximum Capacity 405 l/min
Port Size 1-1/2" (40 mm)



NDP-40 Conductive Kynar® (PVDF)

Dimensions:
405 mm W x 752 mm H
Net Wt.: 32,0 kg
Shipping Wt.: 40,5 kg

NDP-40 Polypropylene

Dimensions:
405 mm W x 752 mm H
Net Wt.: 27,0 kg
Shipping Wt.: 35,5 kg



NDP-40 Aluminum

Dimensions:
412 mm W x 710 mm H
Net Wt.: 29,0 kg
Shipping Wt.: 38,0 kg



NDP-40 Stainless Steel

Dimensions:
411 mm W x 705 mm H
Net Wt.: 43,0 kg
Shipping Wt.: 51,5 kg



NDP-40 Cast Iron

Dimensions:
411 mm W x 704 mm H
Net Wt.: 47,0 kg
Shipping Wt.: 55,5 kg

ANSI 150 FLANGE AVAILABLE ON POLYPROPYLENE,
ALUMINUM, STAINLESS STEEL AND KYNAR PUMPS.

NDP-40 SERIES SPECIFICATIONS

Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	1-1/2" 40 mm DN40 PN10
Conductive Kynar® (PVDF)	1-1/2" 40 mm DN40 PN10
Aluminum(ADC-12)	1-1/2" 40 mm DN40 PN10
(Combi Flange with tapped 1-1/2" 40 mm Female Rc)	

Electro-Polished	
Stainless Steel (316)	1-1/2" 40 mm DN40 PN10
Cast Iron	1-1/2" 40 mm Female Rc
Air inlet (incl. ball valve):	1/2" 15 mm Female Rc
Air exhaust (incl. silencer):	1" 25 mm Female Rc
Notes: Flange connections are equivalent to DN 40 PN 10 and JIS 10K 40A	

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

Rubber diaphragm: 2,74 liters

PTFE diaphragm: 1,40 liters

Maximum Cycles Per Minute

Rubber diaphragm: 148

PTFE diaphragm: 270

Maximum Size Solid

7,0 mm (9/32")

Maximum Dry Suction Lift

Rubber-fitted pump capability: 5,5 m

Air Motor

Standard: Aluminum

Optional: Teflon®-coated or Electroless Nickel Plate

Notes:

Hytel®-fitted pumps include Buna-N wetted o-rings.


Santoprene®-fitted pumps include EPDM wetted o-rings.

Kynar® (PVDF) pumps:



fitted with Santoprene® includes: santoprene balls and PTFE o-rings.

fitted with Hytel® includes: hytel balls and PTFE o-rings.



Model Number Nomenclature

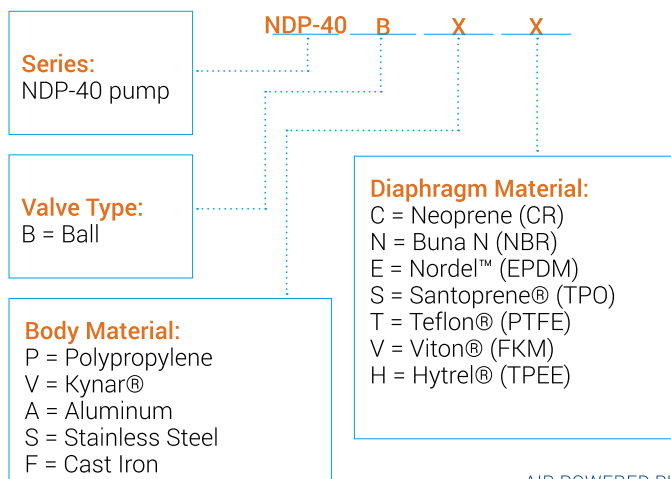

Metal pump Performance Curve

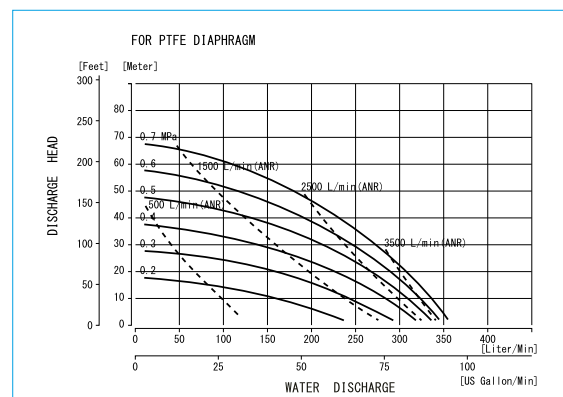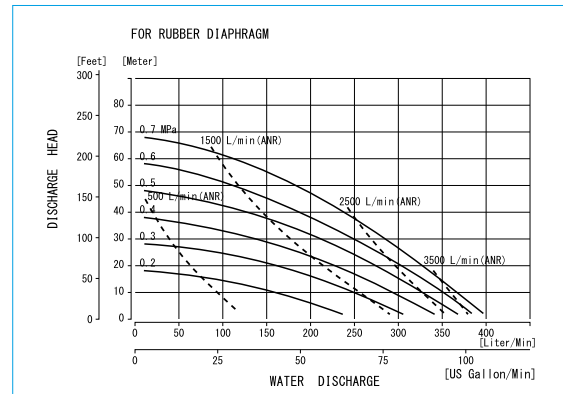

Plastic Pump Performance Curve

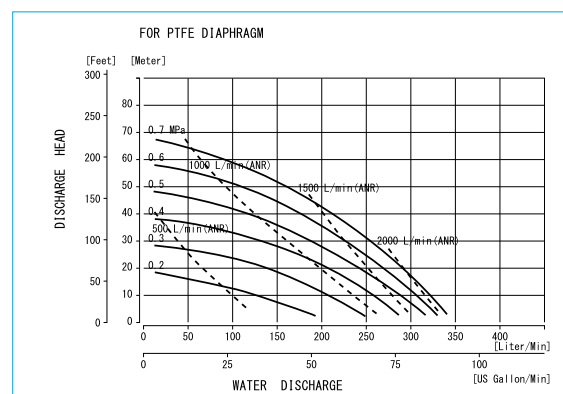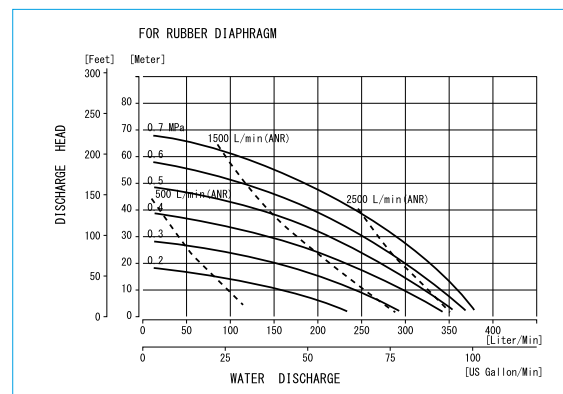

Additional options listed on page 35.

NDP-50 SERIES

Maximum Capacity 620 l/min
Port Size 2 Inch (50 mm)



NDP-50 Cast-iron

Dimensions: 450 mm W x 776 mm H
Net Wt.: 64,0 kg
Shipping Wt.: 76,0 kg

NDP-50 Aluminum

Dimensions:
452 mm W x 779 mm H
Net Wt.: 36,0 kg
Shipping Wt.: 48,0 kg



NDP-50 Stainless Steel

Dimensions:
450 mm W x 782 mm H
Net Wt.: 63,0 kg
Shipping Wt.: 75,0 kg



NDP-P50 Polypropylene

Dimensions:
472 mm W x 821 mm H
Net Wt.: 37,0 kg
Shipping Wt.: 49,0 kg



NDP-50 Conductive Kynar® (PVDF)

Dimensions:
472 mm W x 821 mm H
Net Wt.: 42,0 kg
Shipping Wt.: 54,0 kg



NDP-50 SERIES SPECIFICATIONS

Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	2" 50 mm DN50 PN10
Conductive Kynar® (PVDF)	2" 50 mm DN50 PN10
Aluminum (ADC-12)	2" 50 mm DN50 PN10
(Combi Flange with tapped 2" 50 mm Female Rc)	

Electro-Polished	
Stainless Steel (316)	2" 50 mm DN50 PN10
Cast Iron	2" 50 mm Female Rc
Air inlet (incl. ball valve):	3/4" 20 mm Female Rc
Air exhaust (incl. silencer):	1" 25 mm Female Rc

Notes: Flange connections are equivalent to DN 50 PN 10 and JIS 10K 50A and ANSI 150 2

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

Rubber diaphragm: 4,25 liters

PTFE diaphragm: 2,61 liters

Maximum Cycles Per Minute

Rubber diaphragm: 146

PTFE diaphragm: 220

Maximum Size Solid

8,0 mm (5/16")

Maximum Dry Suction Lift

Rubber-fitted pump capability: 5,8 m

Air Motor

Standard: PPG for Polypropylene pumps

Standard: Aluminum for all others.

Optional: Teflon®-coated or Electroless Nickel Plate.

Optional for all pumps standard fitted with aluminum motor is the PPG motor.

Notes:

Hytel®-fitted pumps include Buna-N wetted o-rings.


Santoprene®-fitted pumps include EPDM wetted o-rings.

Kynar® (PVDF) pumps:



fitted with Santoprene® includes: santoprene balls and PTFE o-rings.

fitted with Hytel® includes: hytel balls and PTFE o-rings.



Model Number Nomenclature

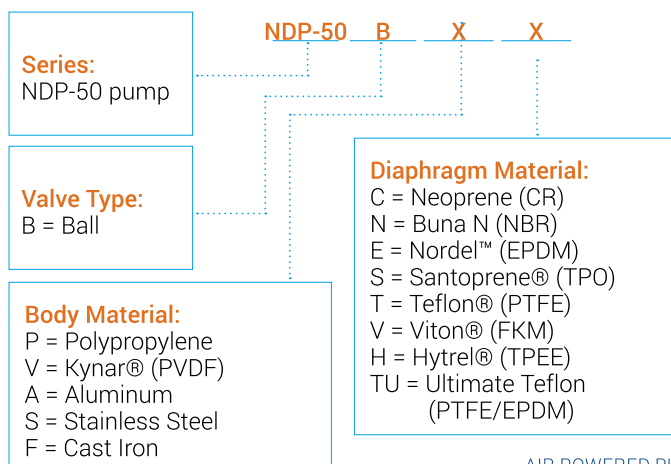

Metalpump Performance Curve

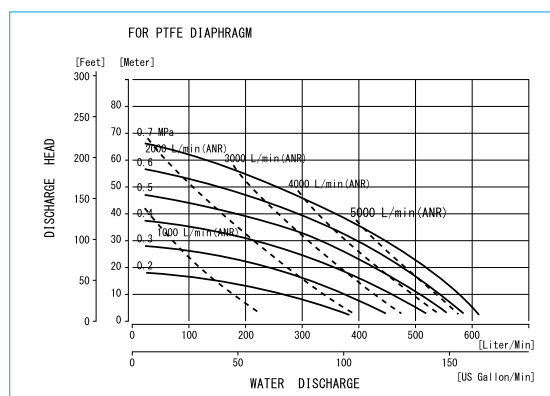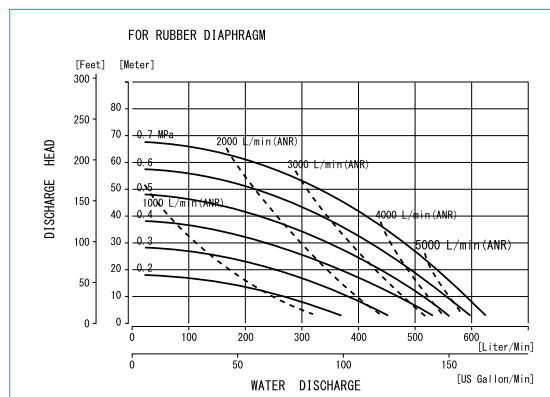

Plastic Pump Performance Curve

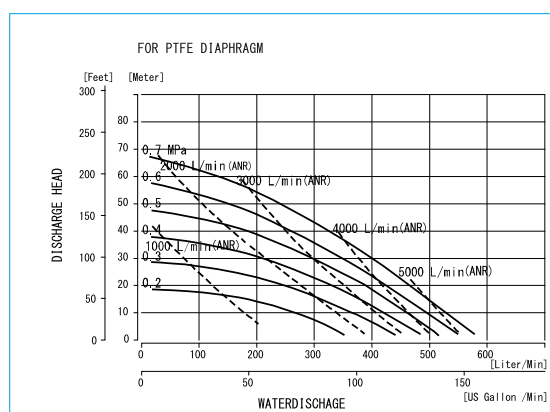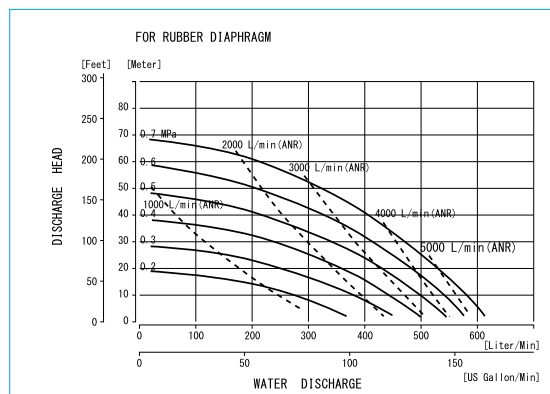

Additional options listed on page 35.

NDP-80 SERIES

Maximum Capacity 814 l/min
Port Size 3" (80 mm)



NDP-80 Stainless Steel

Dimensions: 521 mm W x 984 mm H
Net Wt.: 104,0 kg
Shipping Wt.: 119,0 kg

NDP-80 Aluminum

Dimensions:
522 mm W x 998 mm H
Net Wt.: 62,0 kg
Shipping Wt.: 77,0 kg



NDP-80 Cast Iron

Dimensions:
521 mm W x 984 mm H
Net Wt.: 110,0 kg
Shipping Wt.: 125,0 kg



NDP-80 Polypropylene

Dimensions:
580 mm W x 1044 mm H
Net Wt.: 70,0 kg
Shipping Wt.: 85,0 kg



NDP-80 SERIES SPECIFICATIONS

Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	3" 80 mm DN 80 PN 10
Aluminum (ADC-12)	3" 80 mm DN 80 PN 10
(Combi Flange with tapped 3" 80 mm Female Rc)	

Electro-Polished	
Stainless Steel (316)	3" 80 mm DN 80 PN 10
Cast Iron	3" 80 mm Female Rc
Air inlet (incl. ball valve):	3/4" 20 mm Female Rc
Air exhaust (incl. silencer):	1" 25 mm Female Rc

Notes: Flange connections are equivalent to DN 80 PN 10 and JIS 10K 80A and ANSI 150 3

Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

Discharge Volume Per Cycle

Rubber diaphragm: 8,57 liters

PTFE diaphragm: 3,8 liters

Maximum Cycles Per Minute

Rubber diaphragm: 95

PTFE diaphragm: 160

Maximum Size Solid

10,0 mm (13/32")

Maximum Dry Suction Lift

Rubber-fitted pump capability: 5,8 m

Air Motor

Standard: Aluminum

Optional: Teflon®-coated or Electroless Nickel Plate

Notes:

Hytel®-fitted pumps include Buna-N wetted o-rings.


Santoprene®-fitted pumps include EPDM wetted o-rings.

Kynar® (PVDF) pumps:



fitted with Santoprene® includes: santoprene balls and PTFE o-rings.

fitted with Hytel® includes: hytel balls and PTFE o-rings.



Model Number Nomenclature

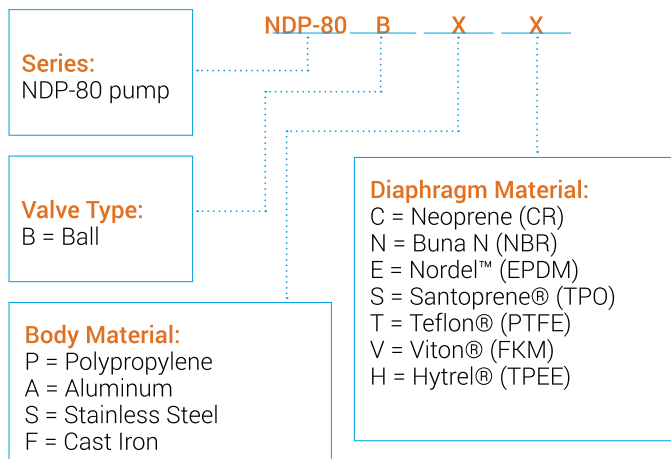

Metal Pump Performance Curve

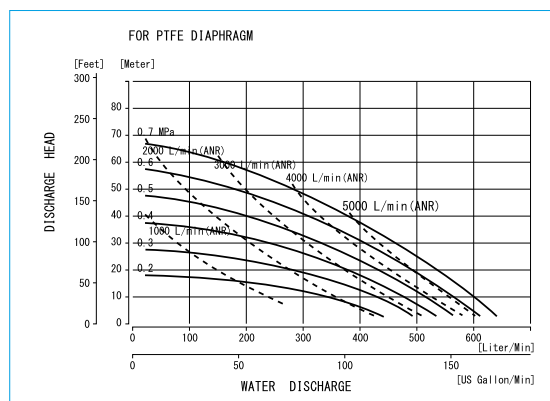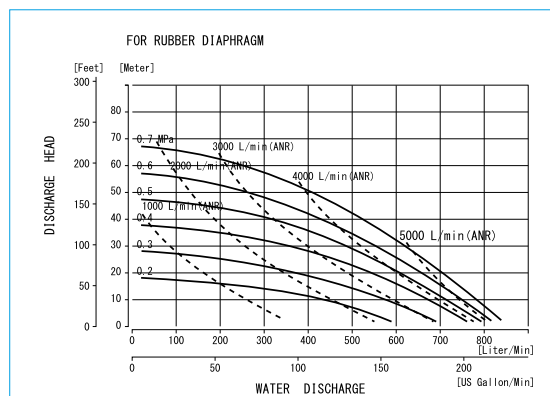

Plastic Pump Performance Curve

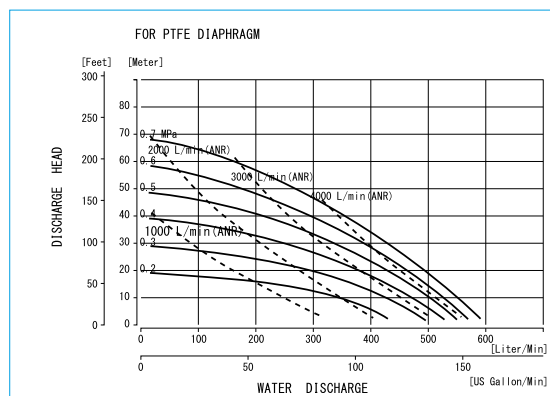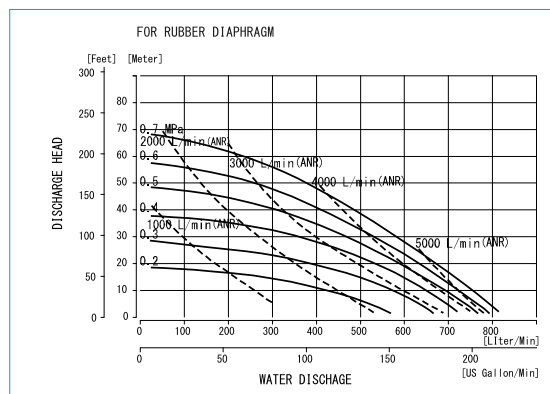


Additional options listed on page 35.


DIMENSIONAL DRAWINGS

NDP-5, DP-10, NDP-10, NDP-15, NDP-20
and NDP-25 Series


NDP-5FAT-FST

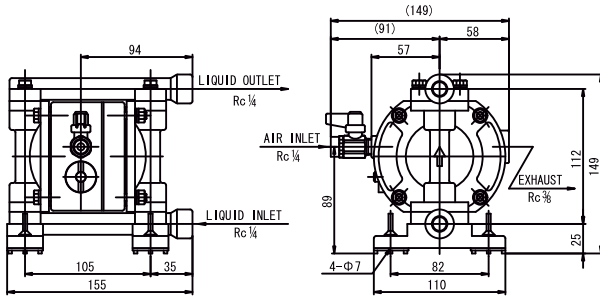


NDP-5FPT-FVT-FDT

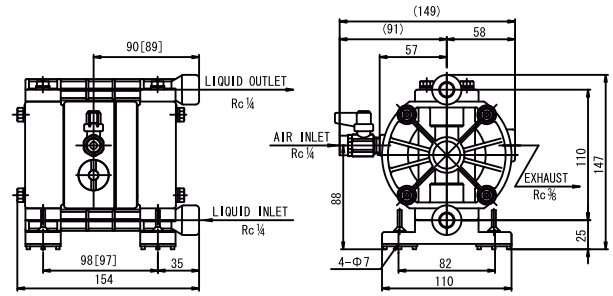


DP-10BA-BS

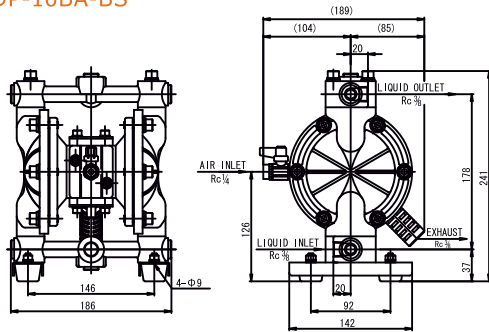


DP-10BP

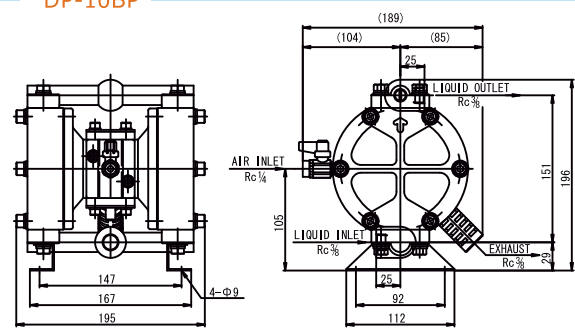


NDP-10BP

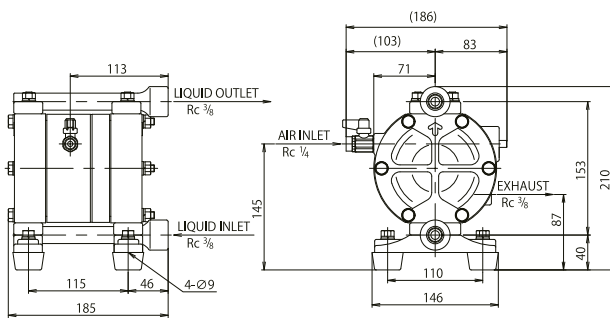


NDP-15BA

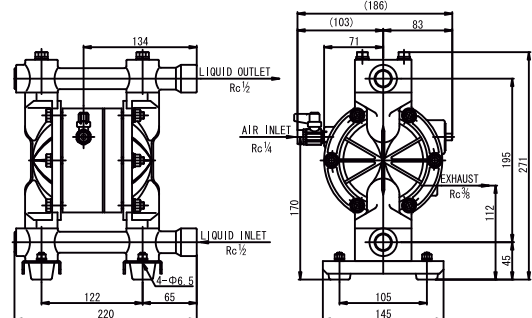


NDP-15BS

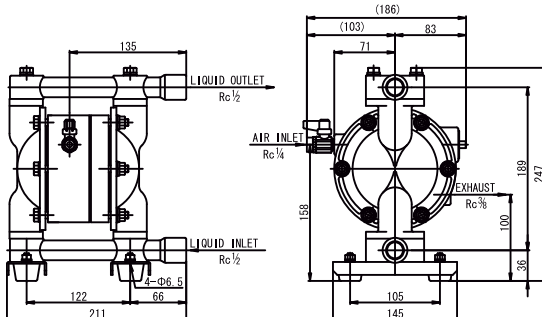


NDP-15BP-FP-FV

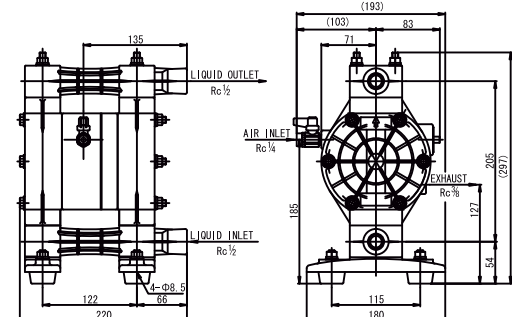


NDP-20BA

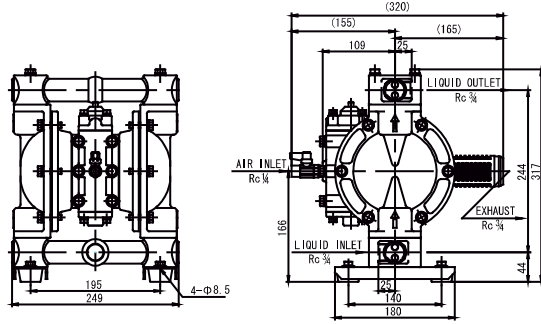


NDP-20BS

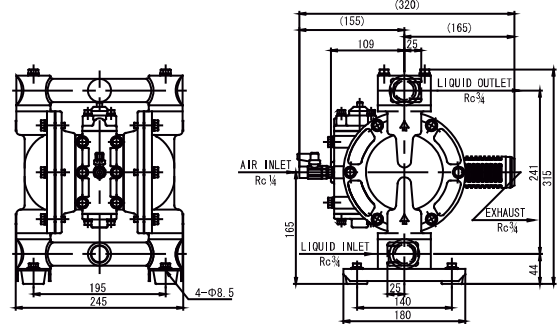


NDP-P20BP

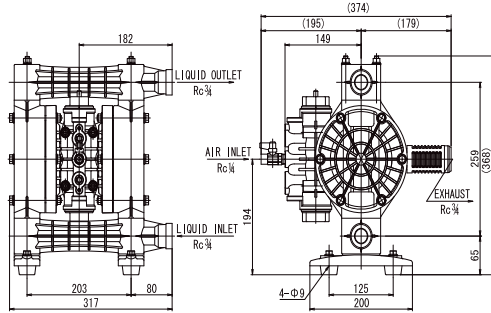


NDP-P20BP-FL

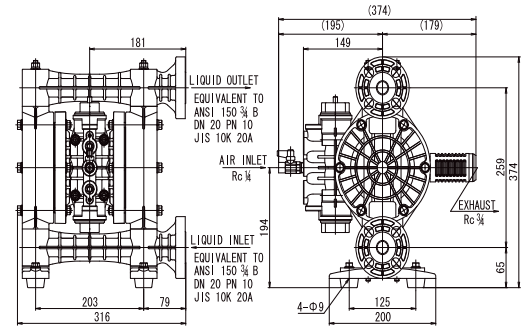


NDP-25BA-BF

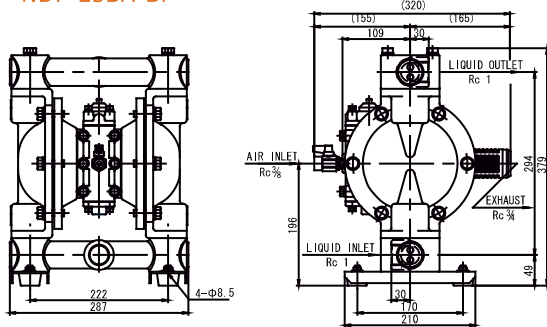


NDP-25BS

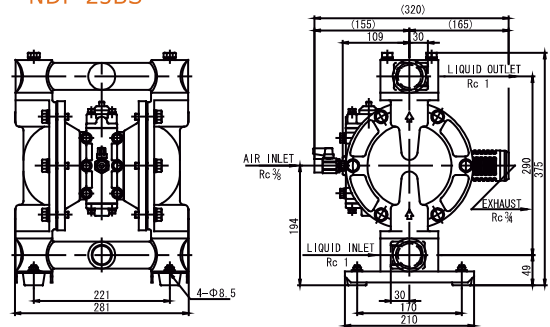


NDP-P25BP

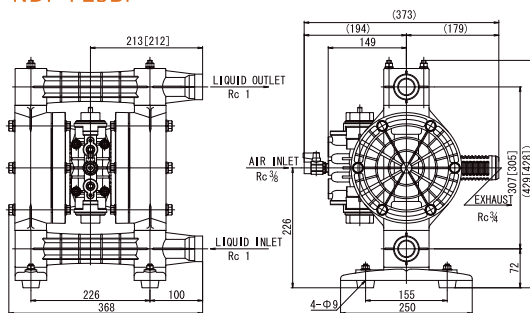


NDP-P25BP-FL

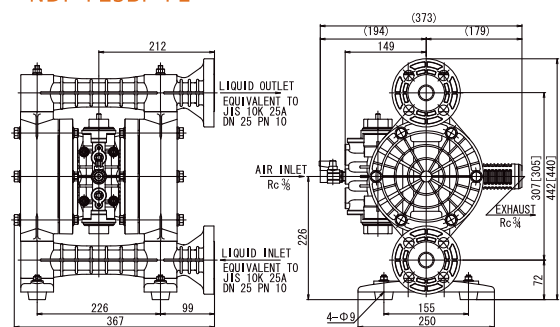

NDP-P25BV

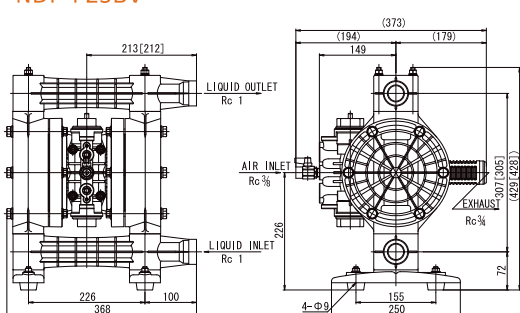

NDP-P25BV-FL

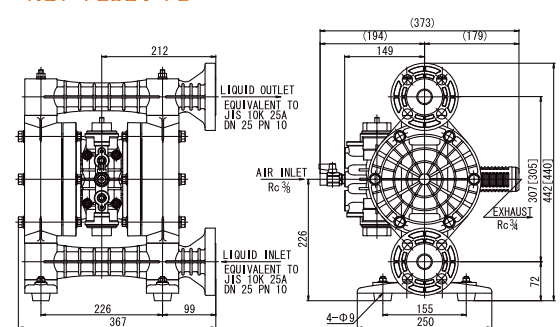

NDP-25, NDP-32, NDP-40, NDP-50 and NDP-80 Series

The technical drawing shows two views of the NDP-25BV valve:

- Front View (Left):** Shows the valve body with two ports labeled "LIMIT INLET BSP 1". Dimensions include a total width of 211 mm, a central port diameter of 26 mm, and a base width of 98 mm.
- Side View (Right):** Shows the valve from the side with dimensions for overall height (200 mm), mounting hole spacing (136 mm), and other structural details like "AIR INLET No. 1/8" and "EXHAUST No. 1/4".

Technical drawing of the NDP-25BV-FL unit, showing front and side views with dimensions and labels.

Front View (Left):

- Overall width: 364
- Overall height: 212
- Bottom width: 225
- Bottom offset: 99
- Labels:
 - LIQUID OUTLET EQUIVALENT TO JIS 10K 25A DN 25 PN 10
 - LIQUID INLET EQUIVALENT TO JIS 10K 25A DN 25 PN 10
- Bottom connection: 4-φ8 5

Side View (Right):

- Overall width: 320
- Overall height: 440
- Top width segments: 155, 109, 185
- Right side height segments: 304, 73
- Bottom width segments: 155, 250
- Labels:
 - AIR INLET Rc 3/8
 - EXHAUST Rc 3/8


The technical drawing shows two views of the NDP-32BA valve:

- Front View (Left):** Shows the symmetrical design of the valve body. Key dimensions include a total width of 277.3 mm, a central bore diameter of $\varnothing 12.8$ mm, and a base mounting hole diameter of $\varnothing 20$ mm.
- Side View (Right):** Provides detailed vertical and horizontal measurements. The overall height is 418.6 mm. The air inlet port has a diameter of $\varnothing 11.4$ mm and a radius of R6. The liquid inlet port has a diameter of $\varnothing 11.2$ mm and a radius of R6.4. The base features a central mounting hole with a diameter of $\varnothing 19.8$ mm and a distance of 110 mm between the centerlines of the base ports. A 45° chamfer is indicated at the bottom right corner.


Technical drawings of the NBP-20BA pump. The left drawing is a front view showing the pump's symmetrical design with two main vertical sections. The right drawing is a side view showing the pump's profile, including the liquid inlet/outlet ports and the exhaust port. Dimensions are provided in millimeters (mm).

[illegible]


NDP-40BV

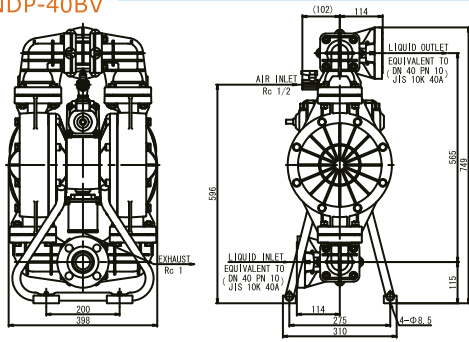


NDP-50BA

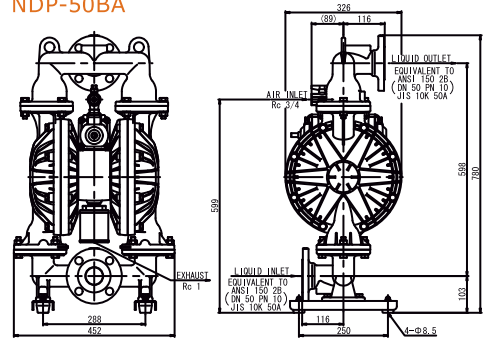


NDP-50BF

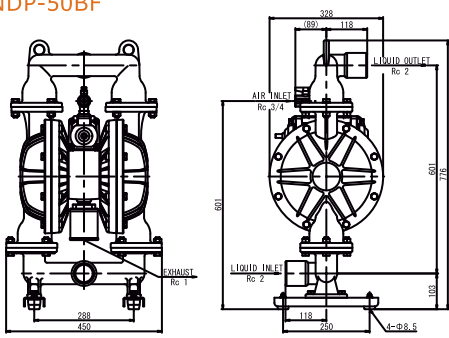


NDP-50BS

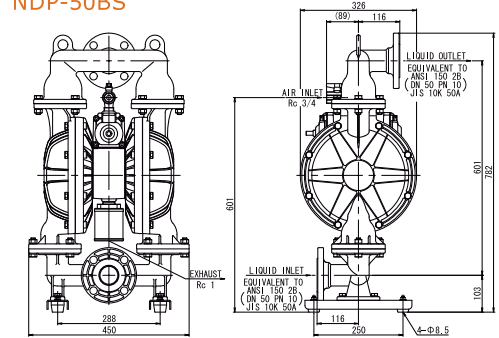


NDP-P50BP

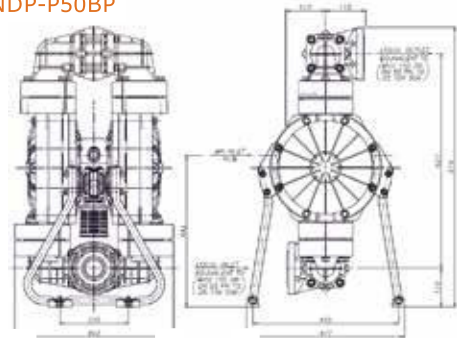


NDP-50BV

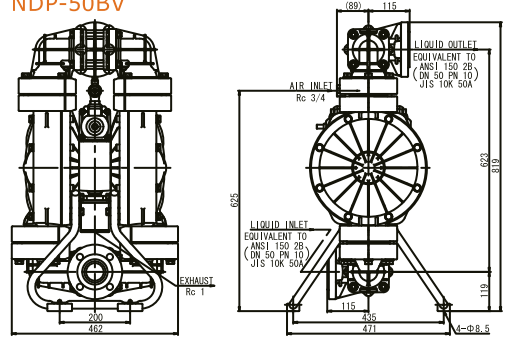


NDP-80BA

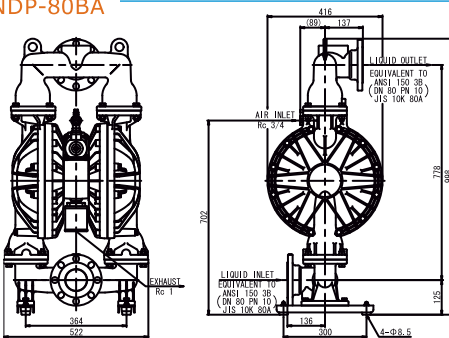


NDP-80BF

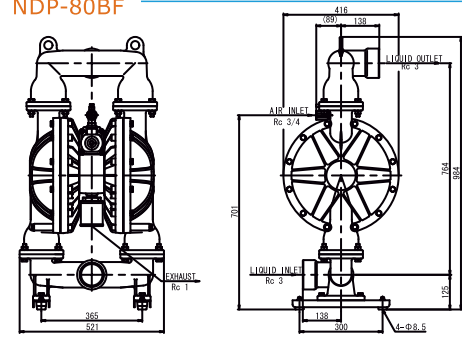

NDP-80BS

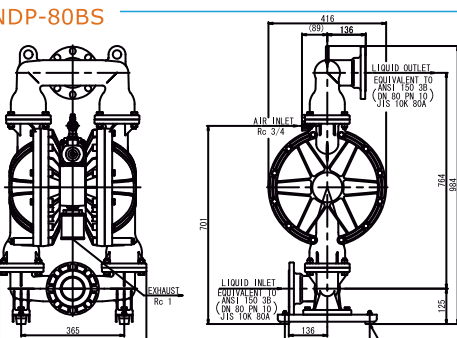

NDP-80BP

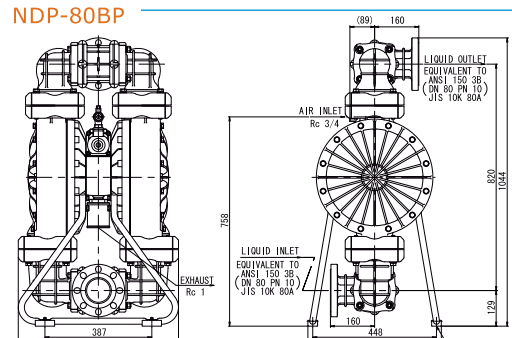



Model NDP-40 HP



Model NDP-25 HP


HIGH PRESSURE 2:1

2:1 Ratio High Pressure Pumps are designed for applications when a maximum 7 Bar operating pressure is insufficient to overcome system requirements. The flow rate is roughly half of the equivalent size pump output, though a maximum discharge pressure of 13 Bar can be achieved with only 7 Bar air inlet pressure supplied. The 2:1 discharge ratio is achieved by applying air pressure to the surface area of both diaphragms, doubling the discharge output.

Port sizes: 3/4"–3"
Construction

Capacity: 1 to 378 l/min
Stainless Steel, Cast Iron
or Aluminum wetted materials

Controls: No elaborate bypass, relief valves, or complicated controls required. Excellent pressure retention.

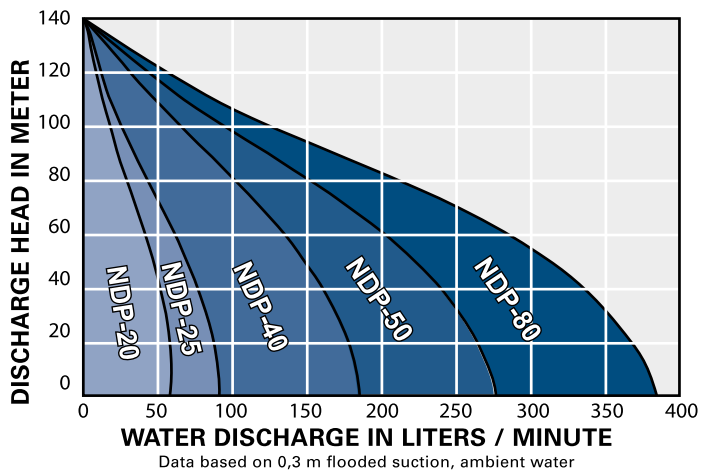

Model NDP-5FPT-Z



Model NDP-15BA.-Z



Model NDP-15FP-Z



Model NDP-20BA.-I

MANIFOLD OPTIONS

Many Yamada pumps come with a variety of multi manifold options offering the user various process solutions. Some options available are 2 in 1 out, 2 in 2 out, 1 in 2 out, vertical middle or side inlets etc. For more information on manifold options please contact Yamada or your local distributor.

Port sizes:

1/4", 3/8", 1/2", 3/4" and 1"

Construction

Polypropylene
Aluminium or Stainless Steel

Modes of operation

1/4", 3/8", 1/2", 3/4" and 1"

Construction

Stainless Steel, Cast Iron
or Aluminum wetted materials



Optional:
1" Rc inlet & outlet side
ports. Available for
aluminum 20 pumps only.



XDP Series Pump

XDP SERIES

The Xtreme Duty Pro™ XDP is designed for use in process type applications including filter press, high pressure, extended deadheading, long runs of discharge pipe and where air consumption is critical.

Air power is conserved by actuating the air valve using a mechanical linkage instead of relying on air pressure. Air power is reduced by 20% vs. A standard air-actuated valve providing more pressure to drive the diaphragm assembly.

Available in 1-1/2", 2" and 3" port sizes, these pumps are built on the liquid platform of a standard NDP Series pump, but with the world's only mechanically-actuated air motor.

Xtreme Duty Pro™ XDP pumps are capable of running on air pressure equivalents as high as 9 Bar or as low as 0,4 Bar and provide the same liquid side performance as the NDP Series pumps.

For additional information, product literature, and drawings please visit www.yamada-europe.com or contact your local Yamada distributor.

POWDER PUMPS

Yamada Powder Pumps are designed to move bulk powders more effectively throughout your process vs. other unsafe and labor intensive means. These heavy duty pumps will consistently transfer fine-grained, low-bulk density dry powders in a dust-free operation.

Port sizes	1-1/2", 2", or 3"
Construction	Aluminum, Cast Iron, or Stainless Steel
Diaphragms	Rubber ones only

Three series of pumps are offered.

Series BH-1

- Vacuum Activated Aeration Valve mounted to suction manifold.

Series BH-2

- Includes all features of the BH-1.
Compressed air induction system fluidizes all four check valves while the pump is operating.

Series BH-22

- Includes all features of the BH-1 and BH-2, however the air fluidization system is separated from the pump working pressure.

Extra options:

- Reinforced center rod with bolted diaphragms
- Y-manifold to optimize the flow



Model BH-2



Model BH-22



Options

Drum Pumps

3/8", 1/2", & 3/4" Port Sizes



FDA-Compliant Drum Pumps are available.

Please consult the factory for details.



NDP-32BAN

DRUM PUMPS

Yamada AODD Pumps have distinct design advantages, making them versatile and cost effective drum pumps.

Models are available in Polypropylene, Aluminum, and Stainless Steel.

Drum pumps are available in 3/8", 1/2", and 3/4" port sizes with flow rates up to 105 l/min.

Refer to DP-10 & NDP-20 technical information for additional performance data. Use applicable NDP nomenclature adding a "D" at the end of the model number. Other sizes and materials are available, consult Yamada.

Port Dimensions

Intake & discharge connection:

Aluminum (ADC-12)	3/8", 1/2" or 3/4" Female Rc
Includes Aluminum Male Rc Bung adapter and suction pipe	

Stainless Steel (316)	3/8", 1/2" or 3/4" Female Rc
Includes Stainless Steel Male Rc Bung adapter and suction pipe	

Polypropylene (PPG)	1/2" or 3/4" Female Rc
Includes PVC suction pipe, elbow, & Bung adapter (PPG also avail.)	

Drum inlet connection	2" Bung
-----------------------	---------

NDP-32 SERIE

The NDP-32 series is a compact, lightweight and easily portable pump with a 1-1/2" liquid inlet and a 1-1/4" vertical outlet. This model corresponds in both footprint dimensions, body size and outlet positions to many pumps used in the marine, oil & gas and mining applications throughout the world. This size pump is often used for waste water or sump / mine dewatering applications and has the ability to pump solid laden slurry solutions. The body is in aluminium with Buna-N diaphragms however can also be prepared with other materials if required. Due to the dimensional standardization it is possible to carryout hard piped pump changeovers without having to modify the piping or system configuration.

Pump model is available in aluminum

Inlet 1-1/2" NPT Outlet 1-1/4" NPT

Air supply pressure 1,4 – 7 Bar



**FDA Compliant
316 Stainless Steel**

FDA COMPLIANT PUMPS

Yamada FDA compliant pumps are specifically designed for Food, Pharmaceutical & Cosmetic industries where 3A or USDA standards are not required.

Pumps include 316 Stainless Steel wetted components with passivated satin finish, teflon coated air motor, sanitary tri-clamp fittings, and FDA compliant elastomers: Hytrel®, EPDM, PTFE, PTFE coated Aluminum motor for sizes 10, 40, 50 and 80.

PPS motor for sizes 5 and 15.

PPG motor for sizes 20 and 25

Eight sizes from 3/4" to 4" sanitary clamp connections

Flow ranges from 1 - 800 l/min

Air pressures ranging from 1,4 to 7 Bar.

Air motor:

Aluminum Epoxy®-coated DP-10, NDP-40/50/80

Ryton

NDP-5-15

Polypropylene (PPG)

NDP-20/25

Finish

Interior mechanical polish available on most models. Consult Yamada

Note:

FDA Series pumps are constructed with oversized sanitary ports.

ELECTRICAL CONTROLLED SERIES DM(B)(X)

Accurate flow control and measurement options. Less parts and extended life expectancy of moving parts including diaphragms. Low pressure movement (from 0,7Bar) is possible in some cases. Unmatched start stop reliability, remote monitoring and control. Variable pump speed control. And many more.

Yamada's range of electrical controlled pumps with direct mounted 5/3 solenoid valves 24V DC are specially designed for process applications which require metering, batching or variable of constant flow control. These pumps offer extreme operation reliability, parts life time and a perfect balanced energy consumption. They are well suited to intense process applications. All DM(B)(X) pumps are operated through a locally positioned or remote PLC device (sold separately) and are available beside standard also as ATEX (X) approved in combination with the conductive pump materials such as metals, Kynar (PVDF) or Acetal.



DM(X) Series

Up till the NDP series 25, Yamada offers standard a DMB motor. The motor is specially prepared for direct mounting of the solenoid valves. The motors of NDP-5, 10 and 15 are made of a conductive plastic, which means they are suitable for an ATEX environment in combination with ATEX coils. For series 20, 23, 25 and 32 Yamada offers an aluminum DMB motor which of course can be protected with the well known high quality PTFE coating Yamada offers.

For series DP-10 and NDP-40, 50 and 80 we use special adaptor plates to mount the 5/3 solenoids, replacing the standard pneumatic valve house.

All pumps can be combined with a sensor for center rod movement detection, stroke or cycle counting, sensor shifting or in extreme situations for calibration. With cycle length calibration a PLC is able to use just a certain percentage of the cycle movement for fine dosing.

For more information, please contact Yamada or your local distributor.



NDP-50FAN

SOLIDS HANDLING PUMP

Flap Valve Pump designed to pump large solids

The Yamada Flap Valve Pump was designed and engineered to address the problems normally associated with flap valve pumps. I.e. Normally due to severe working conditions, there is often a need to remove a pump from service for repairs, cleaning or parts changeovers.

Based on Yamada field proven NDP series foundation, this pump has all of the features and benefits associated with every Yamada pump.

Ingenious Flap Valve design allows for passage of large solids up to 50 mm

Easy access to valve chambers allows easy maintenance when you need it most without the need to remove the pump from service.

Vented diaphragm chambers serve to alleviate problems associated with trapped air/gas.



Repair/clean
in place design



Only 4 bolts to access
flap valves

FEATURES AND BENEFITS

- Repair/clean in place design enables quick servicing of pump
- Up to 50 mm solids handling
- Vent ports to alleviate build-up of air/gas in liquid chamber
- Quick removable flap valves
- Top suction, bottom discharge design will not allow solids to settle in pump.
- Fully non lubricated Air-Valve
- Fully bolted construction
- Short stroke design to help improve diaphragm life.
- Outside-Accessible Air Valve
- Modular Pilot valve design
- No dynamic O-rings to replace or repair.

Modular
Heavy
Duty Flap
Check
Valves



Vent ports to
alleviate
vapour lock
and help
with priming



LIQUID LEVEL CONTROLLER

The Yamada LLC-2Y Liquid Level Controller is a totally pneumatic system designed to automatically start and stop Yamada Air-Powered Double Diaphragm Pumps when the liquid level within a tank, sump, etc. reaches predetermined levels.

An extremely versatile controller, the LLC-2Y can be used in both single and dual pump applications with any size or model Yamada pump. Used in a single pump configuration, it automatically controls either the filling or emptying of a tank or other vessel. When connected to two separate pumps, it will control both the filling and emptying of the tank. This dual pump capability is particularly useful for waste water storage, contaminated water clean up, and other applications where liquids are regularly transferred into and out of a single vessel.

The LLC-2Y consists of a sophisticated air logic control valve housed in an impact-resistant fiberglass reinforced plastic enclosure. As the liquid level within the tank rises or falls, the subtle changes in pressure are transmitted through high and low level dip tubes to the air logic control valve. When the liquid level reaches a predetermined level (tubing is cut in the field to the preferred HIGH and LOW level points), the power valve supplying air pressure to the pump is turned ON or OFF as required.

The LLC-2Y is capable of maintaining liquid levels in virtually any unpressurized vessel. Its liquid level control span ranges from a few inches to dozens of feet. For added convenience, it may be mounted up to 6 meter away from the pump.



DRY-RUN DETECTION

DRD-100 Dry-Run Detector

The Yamada DRD-100 detects increases in air volume due to loss of prime or dry-running, and automatically shuts down the pump to prevent excess cycling and increased diaphragm wear.

Extends life of diaphragm

Eliminate air consumption in dry run applications

Prevents air valve from premature failure

Intrinsically safe operation

Supports remote warning systems

PULSATION DAMPENERS



Model AD-10

AD Series

Metering/Injection/Dosing

Equalizes discharge pressure spikes, increasing accuracy.

Filter Press/Inline Filters

Increases filter efficiency and life by providing a smooth flow.

Spraying: Smooth, consistent spray pattern.

Filling

Eliminates inconsistent filling and splashing.

Transfer

Eliminates harmful water hammer, preventing pipe and valve damage. Yamada Pulsation Dampeners incorporate a flow-through design which keeps solids in suspension, maintaining dampener effectiveness.

A completely automatic air motor self-relieves if reduction of discharge head condition occurs.



Model AD-25

Model AD-40



Model AD-50

Dampener Model

Fits Pump Models

AD-10	NDP-5, DP-10/15, & NDP-15
AD-25	NDP-20 & NDP-25
AD-40	NDP-40
AD-50	NDP-50 & NDP-80

Dampener Model

Connections

AD-10	3/8" Rc port
AD-25	1" Rc port
AD-40	1-1/2" Rc port
AD-50	2" Rc port

Material

Aluminum (ADC-12)	All models
Stainless Steel (316)	All models
Cast Iron	AD-25, AD-40, & AD-50
Polypropylene (PPG)	All models
Kynar® (PVDF)	AD-25, AD-40 & AD-50

Diaphragm

Choice of seven elastomers:


Santoprene®, Hytrel®, Buna N, EPDM, Neoprene, Viton® & PTFE

Air Side Coating Options


Teflon®, or Electroless-Nickel plate air-side

For additional information, product literature, please visit www.yamada-europe.com or contact your local Yamada distributor.

Without Pulsation Dampeners

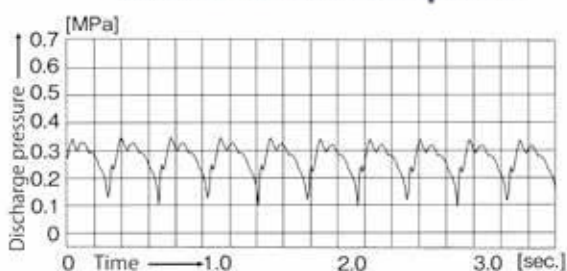

With Pulsation Dampeners

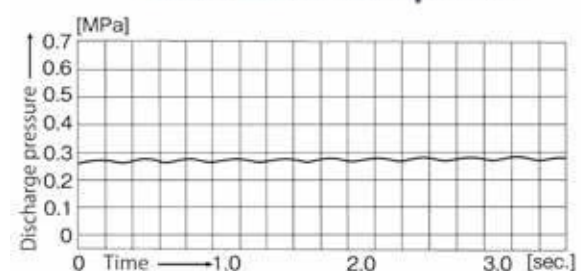



Rubber Compounds

Neoprene (CR)

Excellent for non-corrosive abrasive applications.

Identification: dull black with no color dot

Temperature range: -18°C to 82°C

Buna-N (NBR)

Excellent for petroleum based fluids.

Identification: black with a red or pink dot

Temperature range: -12°C to 82°C

Nordel™ (EPDM)

Excellent for low temperatures, caustics and some acids.

FDA Compliant EPDM Material (must be specified).

Identification: black with green dot

Temperature range: -40°C to 100°C

Viton® (FKM)

Excellent for aggressive fluids and high temperature applications.

Identification: black with silver or blue dot

Temperature range: -29°C to 120°C



The TU diaphragm has a rod connection only at the air side and an easy to clean liquid surface. This means no ink or paint residue will accumulate behind bolts, center disks etc. which prevents color contamination. Temperature Range: 0°C to 85°C with a short peak load up till max 100°C

* Please note that excessive inlet pressure or excessive suction lift can shorten diaphragm life. Please consult Yamada for further information.

PUMP DIAPHRAGMS

What to consider when selecting the proper diaphragm material

- Chemical resistance
- Estimated flex life
- Temperature limitations
- Abrasion resistance
- Cost

Also beside the correct diaphragm, the correct pump material must be selected, being chemical, temperature and abrasive resistant.

Thermoplastic Compounds

Hytrel® (TPEE)

Excellent general-purpose diaphragm for non-corrosive abrasive applications and high-flex life. FDA compliant material.

Identification: Tan/Cream Thermoplastic

Temperature Range: -18°C to 120°C

Santoprene® (TPO)

Excellent for acids or caustics with a very high flex life.

Identification: Black Thermoplastic

Temperature Range: -23°C to 100°C

Teflon® (PTFE)

Excellent choice for pumping highly aggressive fluids, including solvents.

Identification: White Thermoplastic

Temperature Range: 4°C to 100°C

Ultimate Teflon bonded Diaphragms

TU® (PTFE/EPDM)

This so called high performance easy clean PTFE diaphragm has earned its reputation already in the ink, paint and printing industry for more than 15 years. In this 24/7 industry the diaphragm has proven its reliability. This high flexible PTFE diaphragm has a much better estimated life time compared to standard PTFE diaphragms. Standard diaphragms have thread, nuts and center disks inside the liquid area.

MIN/MAX FLUID TEMPERATURE TO PUMP

For metal pumps it is dictated by the elastomer (diaphragm material).

For the synthetic pumps, it depends.

PPG and POM may not be used for temperatures below 0°C or higher as 82°C.

PVDF pump may be used until a minimum temperature of -17°C only when the diaphragm material is also able to handle that. As a max temperature it can handle 100°C. Also here it depends if the diaphragm material can handle that temperature also.

Pump Material	-	Code	-	Min °C	-	Max °C	Min °F	-	Max °F	Diaphragm Material	-	Code	-	Min °C	-	Max °C	Min °F	-	Max °F
Polypropylene reinforced (PPG)		BP./FP.		0	-	82	32	-	180	Neoprene (CR)		C		-18	-	82	-0.4	-	180
Conductive Delrin® (POM)		FDT		0	-	82	32	-	180	Nordel™ (EPDM)		E		-40	-	100	-40	-	212
Conductive Kynar® (PVDF)		BV./FV.		-17	-	100	1.4	-	212	Hytrel® (TPEE)		H		-18	-	120	-0.4	-	248
										Buna-N (NBR)		N		-12	-	82	10.4	-	180
										Santoprene® (TPO)		S		-23	-	100	-9.4	-	212
										Teflon® (PTFE)		T		4	-	100	39.2	-	212
										Ultimate Teflon® (TU®)		TU®		4	-	100	39.2	-	212
										Viton®		V		-29	-	120	-20.2	-	248

OPTIONAL COATINGS ALUMINIUM AIR MOTORS



Electroless-Nickel
Plating


Teflon® Coating

Teflon® coating and Electroless-Nickel plating is available for Yamada pumps for two primary reasons:

Environment: Pump installation in a chemically aggressive location where material or fumes not compatible with Aluminum may contact the air motor; or

Diaphragm Failure: If properly selected, the coating or plating will defend the major Aluminum air valve components from the fluid being pumped. For internal and external protection, the four major air motor components are independently coated or plated then assembled.

IDEAL AIR-POWERED DOUBLE DIAPHRAGM PUMP INSTALLATION

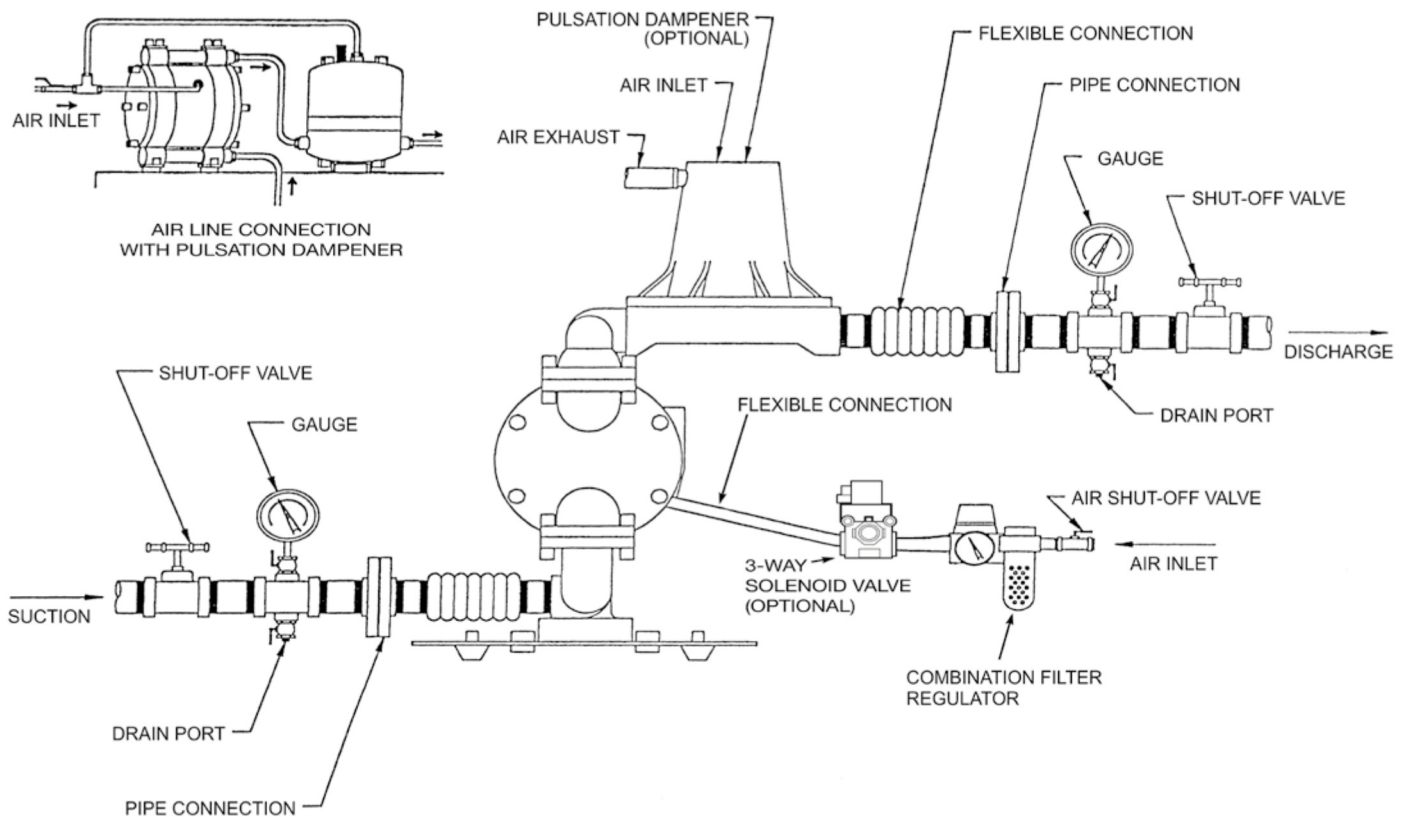

ADDITIONAL OPTIONS

Model Number Nomenclature

XXX- X XX X X X - X

**PUMP SERIES;
NDP / DP**

MOTOR (OPTION)

CONNECTION SIZE

CHECK VALVE TYPE

BODY MATERIAL

**DIAPHRAGM
MATERIAL**

C:	CR	NEOPRENE
E:	EPDM	NORDEL™
H:	TPEE	HYTREL
N:	NBR	BUNA-N
S:	TPO	SANTOPRENE®
T:	PTFE	TEFLON®
TU®:	PTFE/EPDM	
V:	FPM	VITON®

A:	ALUMINIUM
S:	SS316
F:	CAST IRON
P:	PPG
D:	DELIRIN
V:	PVDF KYNAR
T:	PTFE TEFLON®

B:	BALL VALVE
F:	FLAT VALVE NDP-5 NDP-15 PLASTIC
F:	FLAP VALVE 50FAN

5:	1/4"	12 l/min
10:	3/8"	22 l/min
15:	1/2"	51 l/min
20:	3/4"	120 l/min
25:	1"	170 l/min
32:	(in) 1,5"	
	(out) 1,25"	190 l/min
40:	1,5"	405 l/min
50:	2"	620 l/min
80:	3"	814 l/min

To properly specify a Yamada pump, the following information is required.

- Material to pump
- Viscosity
- Density
- Particle size
- Required capacity L/min
- Corrosive
- Abrasive
- Temperature
- Available air pressure
- Application details like: Diameter, length, height, depth etc. all fluid lines.

Yamada sales team and your distributor are there to help you, choosing the best and most cost effective pump solution.

Yamada®, SolidPRO®, Xtreme Duty Pro™ XDP are registered trademarks of Yamada America, Inc
Hytrel® & Teflon® are a registered trademarks of E.I. du Pont de Nemours and Company.
Kynar® is a registered trademark of Arkema.
Nordel™ is a registered trademark of Dupont Dow Elastomers.
Ryton® is a registered trademark of Chevron Phillips Chemical Company.
Santoprene® is a registered trademark of Monsanto Co.
Viton® is a registered trademark of Dupont Performance Elastomers

Motor (option)

- P: PPG motor, size P20, P25 and P50
(=standard all PPG pumps 20, 25 and 50)
H: XDP motor, size H40, H50 and H80 (see page 27)

Special Pumps:

- BH1: Powder pumps Series 1
BH2: Powder pumps Series 2
BH22: Powder pumps Series 22
P: Reinforced rod + bolted diaphragms
Y: Y-manifold stainless steel NDP-40, 50, 80
HP: High pressure 2:1 pump metal 20 until 80
D: Drum pump until size 20
FDA: FDA compliant series

Additional Options

Ball Options

- NBR: Ball-N
E: Nordel™
S: Santoprene®
T: Teflon® ball
V: Viton® ball
S1: Stainless steel ball (until size 50)
Stainless steel flat (NDP-5/15)

Valve seat Options

- T2: Teflon® (only NDP-40 and 50)
V2: Viton®
S2: Stainless steel machined seat

Combi SUS ball/seat/guide:

- S3: Stainless steel guide (until size 25)
SS: Stainless steel seat + ball (S1 + S2)
ST: Stainless steel seat + guide (S2+S3)
ST1: S1 + S2 + S3

Connection options:

- I: Split inlet manifold (Double in)
O: Split outlet manifold (Double out)
Z: Double in and out
I, O and Z only until size 25
FLG: DN flange connection ≥ size 15
FLGA: ANSI flange connection ≥ size 15
NPT: NPT female thread connection

Air Motor options:

- X2: Nickel plated aluminum motor
XS: PTFE coated aluminum motor

Electrical control options:

- P2: Proximity sensor
PX: Proximity sensor ATEX
RM: Electr. on/off solenoid 24VDC
RMX: Electr. on/off solenoid 24VDC ATEX
DM: Full solenoid control 24VDC
DMX: Full solenoid control 24VDC ATEX+
(DM(X) DP-10, NDP-P20/P25, 40, (P)50 and 80)
DMB: Full solenoid control 24VDC
DMBX: Full solenoid control 24VDC ATEX
(DMB(X) for NDP-5, 15, 20, 23, 25, 32)
Q: Leak sensor(s) (Diaphragm rupture)

Specific options:

- 1: PTFE O-rings
1S: 1" side connection NDP-20BA
N: Special bearing dry air
XPS: Extreme duty C-spool NDP-20/25

Accessories options:

- AP: Abrasion PAD
J: Speed control muffler
L: De-stroke NDP-20 until 80



Due to Dutch, European and international trade laws, Yamada-products may require licensing prior to export or re-export. We request that when dealing with Yamada-products that you take the utmost care in ensuring that all required legal procedures are carried out correctly.

Your Local Distributor/Sales & Service Centre:



Ref NR.: EN0719



Yamada Europe B.V.

Aquamarijnstraat 50 • 7554 NS Hengelo (OV) • The Netherlands

Phone: +31 (0)74-242 2032 • E-mail: sales@yamada-europe.com